



**LAYERZERO**  
POWER SYSTEMS, INC.

The Foundation Layer

## Series 70 eRPP-SL2

Slim Remote Power Panel



Product Brochure

# eRPP-SL2 Facilitates High-Density Distribution With 336 Poles In Two Tiles

## Make The Most of Available Data Center Space

The Series 70: eRPP-SL2 maximizes white space by allowing up to 336 poles in two floor tiles. The eRPP-SL2 permits a variety of configurations; single floor-mounted, single wall-mounted, side-by-side, back-to-back, and back-to-back plus both sides. eRPP-SL2 maximizes safety, with the finger-safe SafePanel™ panel board, and no exposed live parts. eRPP-SL2 includes Zen DPQM™, with advanced power quality monitoring capabilities, including real-time waveform capture. For applications that require maximization of available critical facility space while maintaining the highest reliability, eRPP-SL2 is an ideal solution.



## LayerZero's eRPP-SL2 Product Features

### Reliability

---

- ☑ **Silver Plated Input Terminals:** Silver Has Excellent Conductivity To Provide Superior Electrical Performance and Reliability
- ☑ **Machined Hardware:** Machined Cap Screws and Engineered Disc Springs Maintain Constant Torque Throughout Product Life
- ☑ **Convection Cooling:** Natural Convection-Cooled Heat Dissipation System is Maintenance-Free
- ☑ **Serialized Critical Board Tracking:** Critical Boards Are Serialized And Cataloged in an Active Database For Traceability
- ☑ **Selective Trip Coordination:** Main Breaker Will Not Trip In The Event of a Downstream Fault.
- ☑ **High Density Distribution:** Supports High-Density and Ultra-High Density Distribution

### Safety

---

- ☑ **InSight™ IR Portholes:** Bolted Connections Can Be IR Scanned With the Dead-Front Doors Closed
- ☑ **Sectionalized Components:** Separations Between Each Section To Maintain Maximum Operator Safety
- ☑ **Polycarbonate Windows:** Allows Circuit Breaker Positions Viewed With The Dead-Front Door Closed
- ☑ **Dead Front Hinged Doors:** Barrier To Provide A Safe Working Area With No Exposed Live Parts
- ☑ **Guided Wireways:** Helps Keep Wires Organized

### Connectivity

---

- ☑ **Ethernet Connectivity:** Secure VPN Router Connects To Network For Advanced Remote Monitoring Capabilities
- ☑ **Modbus/TCP:** Open Connectivity to Existing Monitoring Systems Without Proprietary Limitations
- ☑ **NTP Time Clock Synchronization:** Facilitates Timeline-Based Logging For Post-Event Reconstruction
- ☑ **SNMP Connectivity:** Permits Remote Management Via Simple Network Management Protocol
- ☑ **Bluetooth Connectivity:** Wirelessly Set Up Panels At The Point-Of-Impact

### zenDPQM

---


- ☑ **Real-Time Waveform Capture:** Automatically Captures A Picture Of The Power Six-Cycles Before and After Every Event
- ☑ **Optional Local Touch-Screen Interface:** Password-Protected Color Touch-Screen GUI For Local Setup/Operation
- ☑ **Black-Box Forensics:** eRPP-SL2 Captures and Records Events To Provide Vital Information In Root-Cause Analysis

All LayerZero products break down power sources into samples for power quality analysis. This data is remotely accessible by connecting to the units via web browser.



The following “voltage sag” factory test was performed on a LayerZero Series 70 ePODs: Type-X PDU. Each phase is represented by a colored line, plotting the voltage over a period of time.

In the example below, the voltage of all three phases dropped below the user-defined setpoint, which triggered an undervoltage event, an automatic waveform capture, and an ITIC plot of the event.

On LayerZero PDUs and RPPs, waveforms and ITIC plots are generated for every phase, on every circuit, for every event.

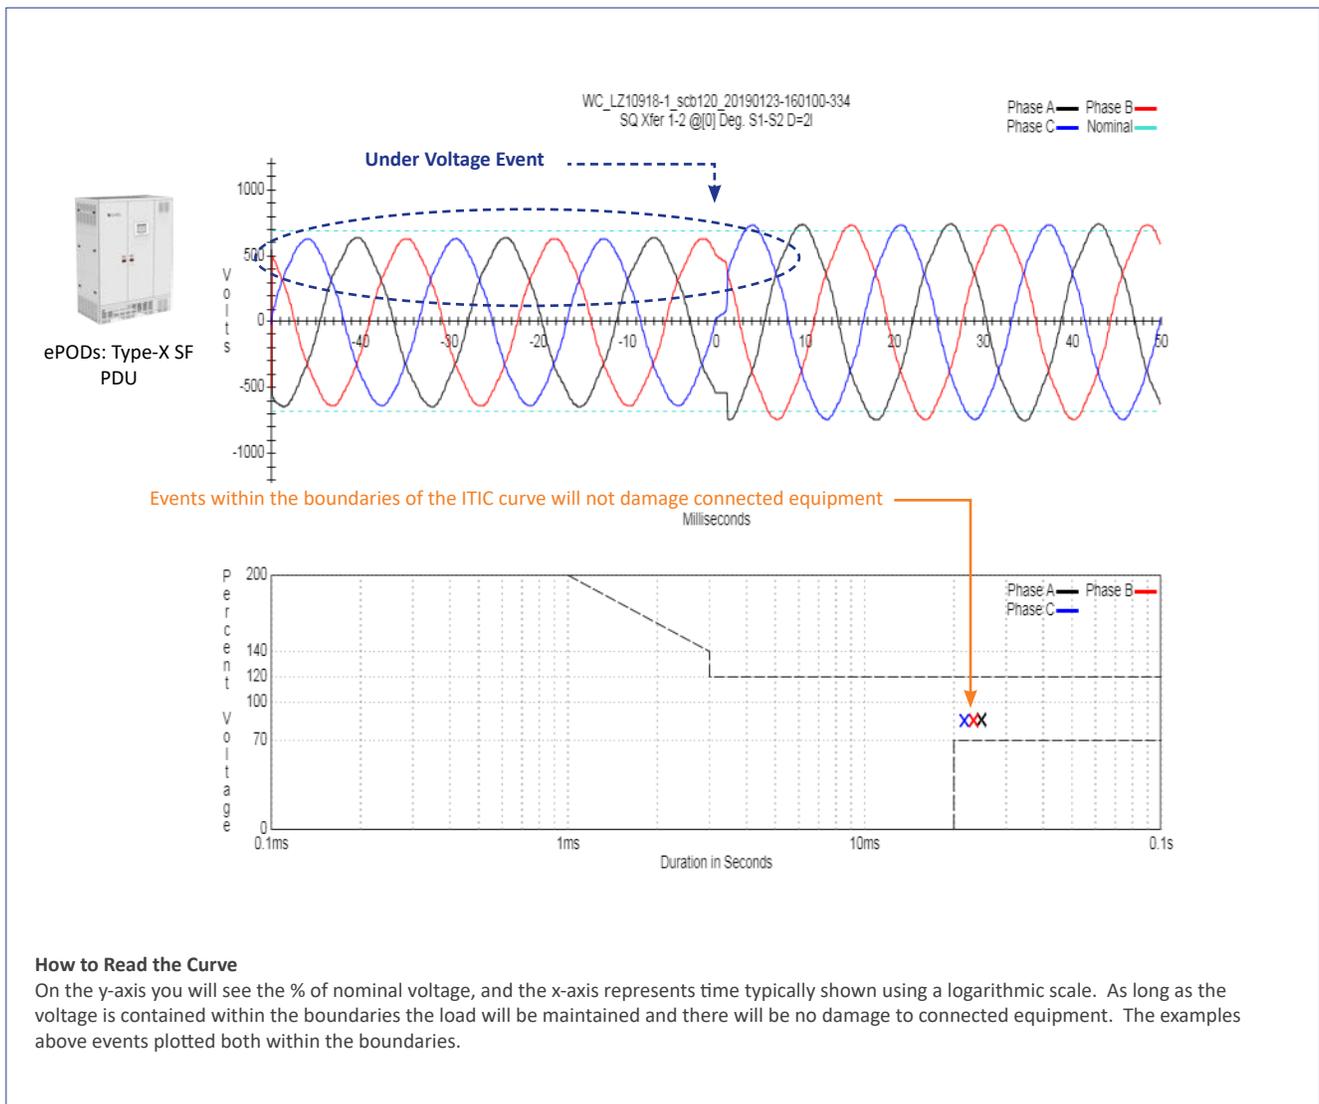

Equipment Layout

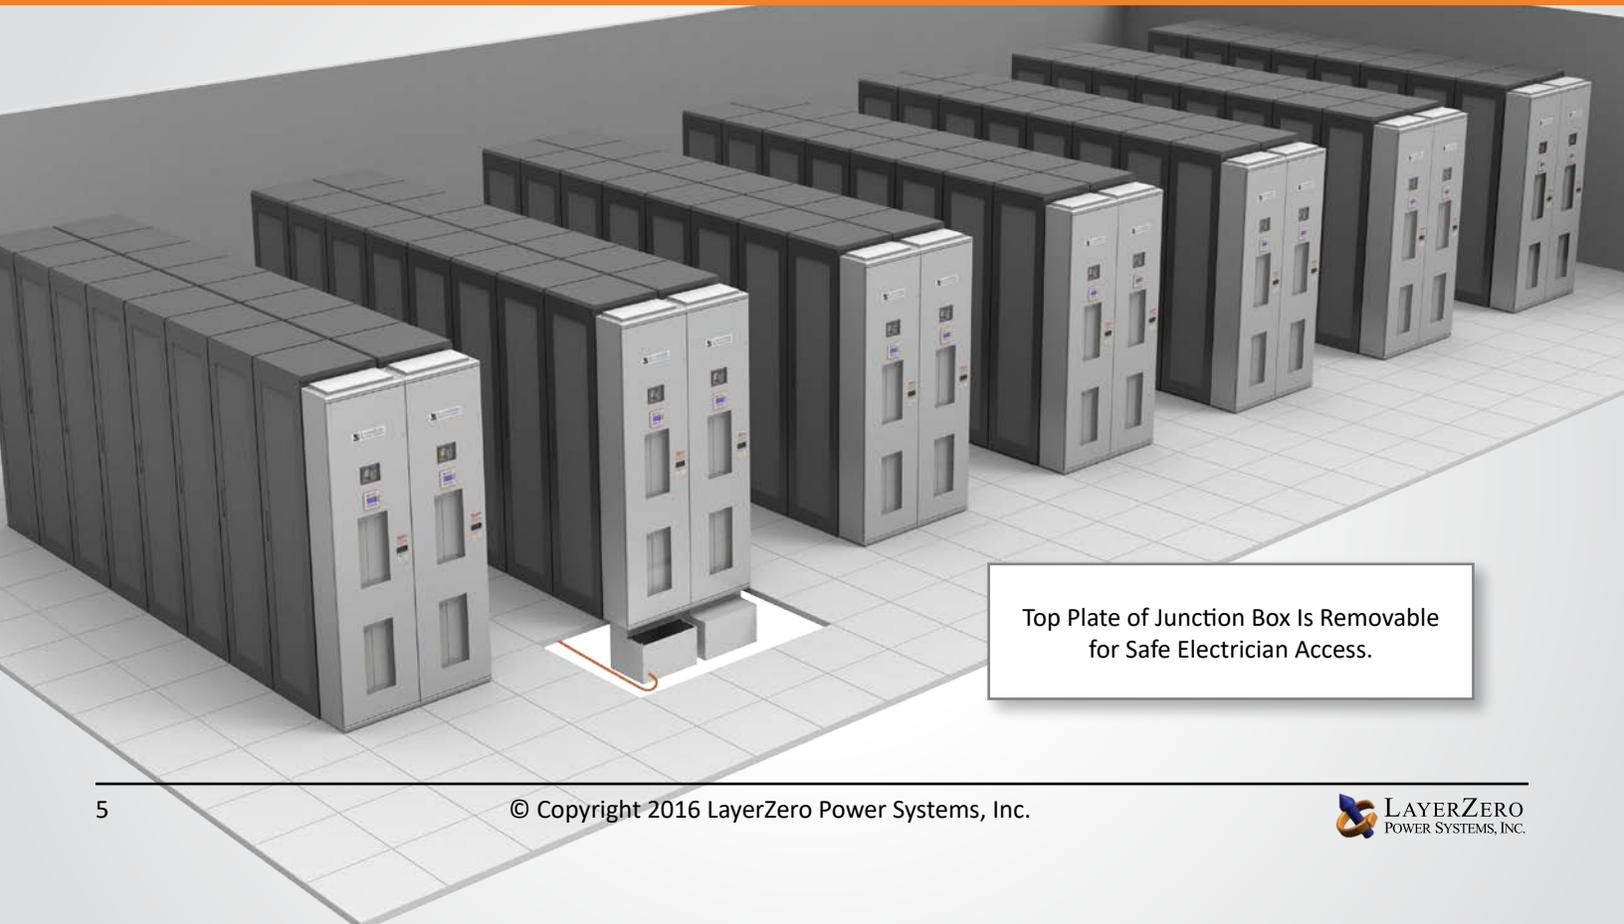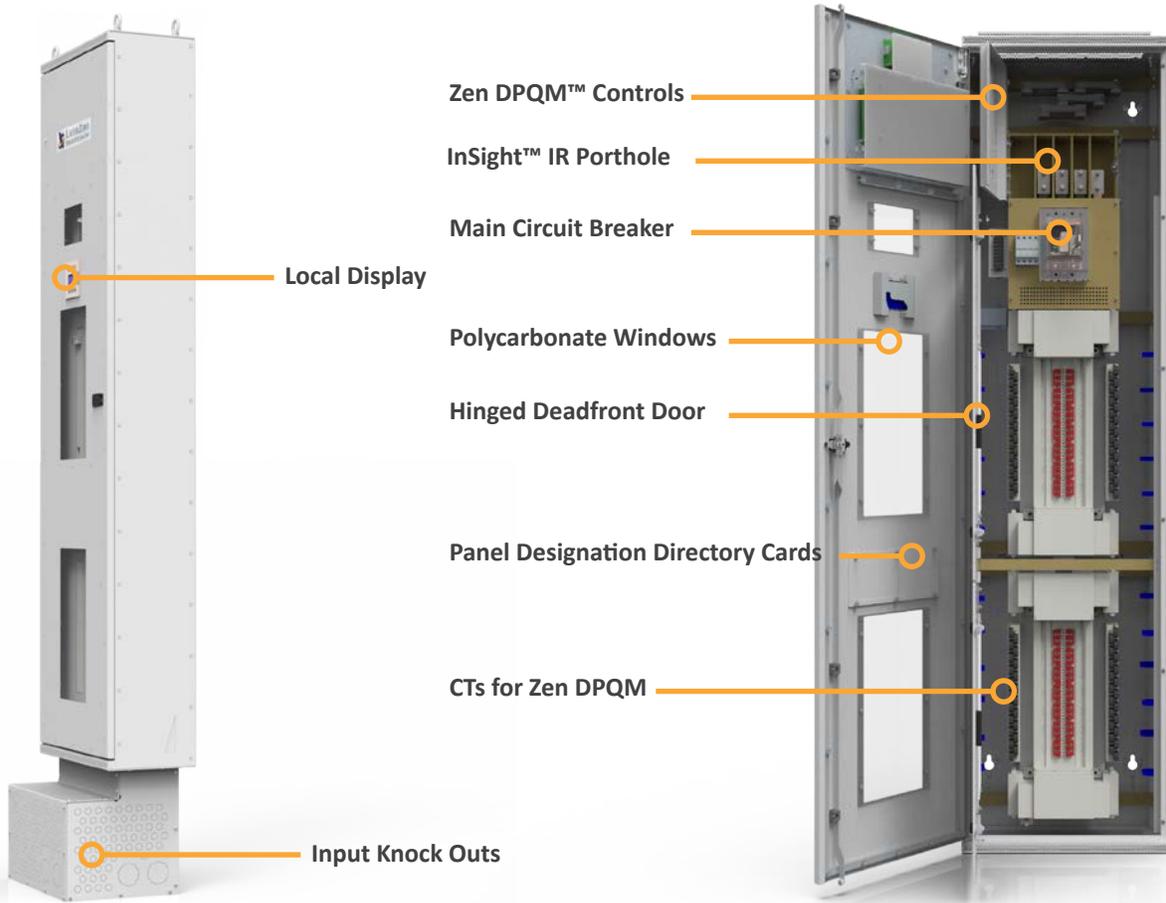


Mounting Configurations

Flexible Mounting Options

eRPP-SL2 can be free-standing or mounted on a wall.

Feeder cables are located below the tile.

eRPP-SL2 is available in a variety of configurations that maximize the effectiveness of critical facility space. Up to 336 poles can be installed in two data center tiles.

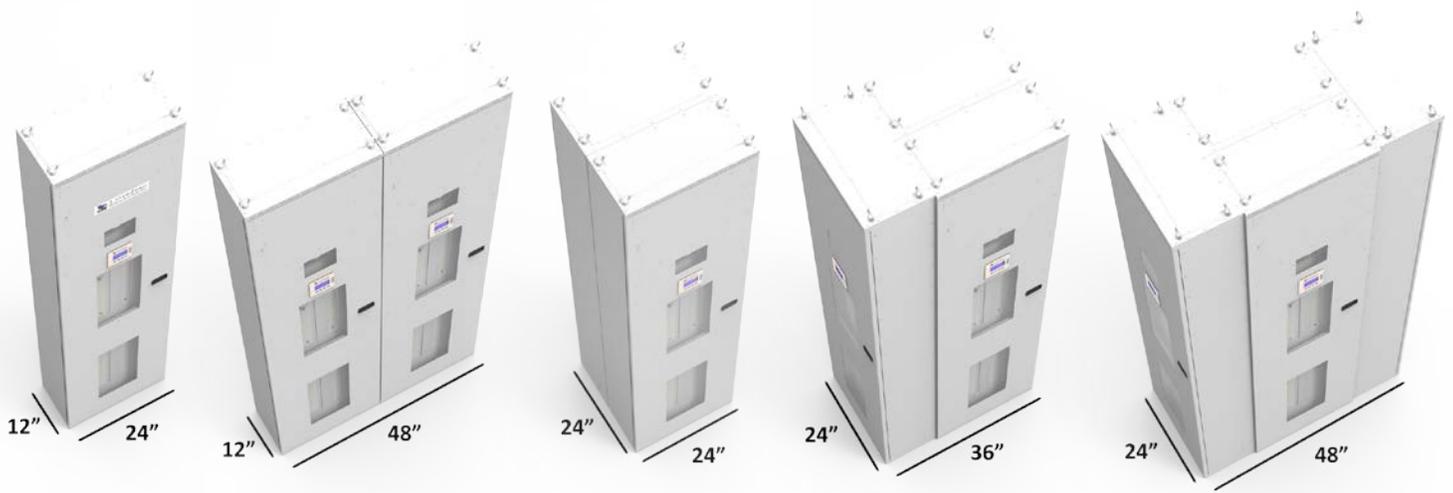

**Single**

- Half Tile
- Wall or Floor Mounted

**Side-By-Side**

- 2X Half Tile
- Wall or Floor Mounted

**Back-To-Back**

- Single Tile
- Floor Mounted

**Back-To-Back + 1 Side**

- Single Tile + Half Tile
- Floor Mounted

**Back-to-Back + 2 Sides**


- Two Tiles
- Floor Mounted

Reliability Features

**Selective Trip Coordination**

LayerZero Series 70 eRPP-SL2 Remote Power Panels are selective trip coordinated.


Selective Trip Coordination ensures that the main breaker will remain unaffected by the branch circuit breakers in the event of a downstream fault.

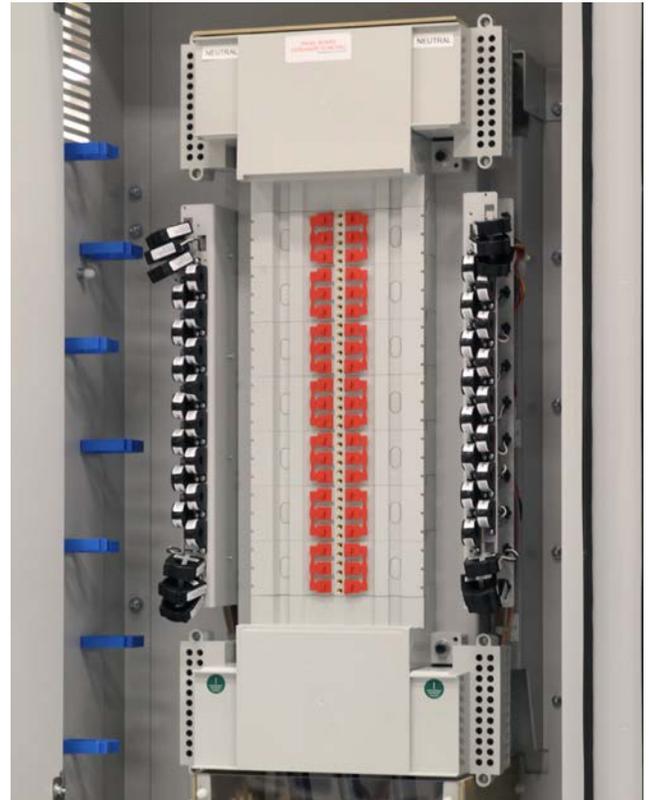

The Fault Current Opens the Solenoid Magnet, Causing The Contacts To Part



Unequal Pressure on Each Side of The Arc Causes the Plasma Wave To Rotate Away From The Contacts

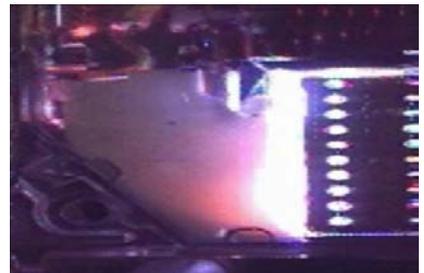

The Plasma Wave is Driven into 12 Evenly Spaced Dividers



The Plasma is Rapidly Cooled



Transient Voltage Attempts To Re-Strike The Arc, But The Plasma Is Again Pushed Into The Dividers



When Sufficiently Cool, Charged Particles Recombine And The Fault Current Is Stopped Quickly & Safely

## Ease of Maintenance

**Scan Bolted Connections with Dead-Front Doors Closed**

Strategically positioned IR-scan portholes to enable safe thermal scanning of all bolted connections with the deadfront closed, without exposing the operator to power circuit voltage.

The IR window swivels upward and unlocks with key-hole access to reveal a mesh, allowing the operator to point-and-shoot thermal cameras to obtain accurate readings. LayerZero provides documentation for proper thermal scanning procedures.

**View Status LEDs and Distribution CB Positions With Dead-Front Doors Closed**

The Series 70: eRPP-SL2 is equipped with polycarbonate windows located on the outer door.

Circuit breaker positions can be viewed with the dead-front door closed.



Safety Features


**Circuit Breaker Shrouds**

LayerZero Series 70 eRPP-SL2 Remote Power Panel provides optional circuit breaker shrouds, designed to eliminate exposure to live parts.



**No Exposed Live Parts**

LayerZero’s patent-pending Circuit Breaker Shrouds cover exposed wiring, maximizing operator safety.

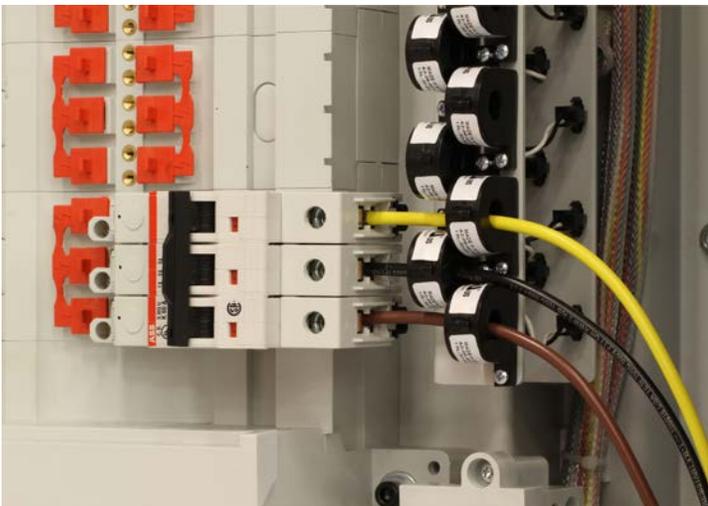

Wiring Without Shrouds Leaves Wiring Exposed



Circuit Breaker Shrouds Maximize Operator Safety

Safety Features

**The LayerZero Finger-Safe SafePanel™**

The Series 70 eRPP-SL2 features an IP-20, finger-safe panel board, meaning that the opening will not allow ingress of ½" (12.5mm) diameter probe, for maximum operator safety.

An arc can form as two live conductors are separated – such as the removal of a circuit breaker from a panel board. The SafePanel design ensures that a potential arc would be contained in the connection well so that even if a branch breaker were to be removed, the arc would be contained in the connection well.

Insulated with the components deeply isolated, removal of the breaker is safe and easy.



Isolated, Non-Conducting Brass Screws



The Protective Cover Is Removed



The Breaker Is Inserted Into The Opening



The Breaker Snaps Into The DIN Rail




The Breaker Is Secured With An Isolated, Non Conducting Screw

Connectivity Options

Bluetooth Keeps Panel Board Names Up-To-Date

Coordinate efforts to keep panel board naming conventions accurate and up-to-date with Bluetooth connectivity. In critical facilities, Facilities typically install the physical circuit breakers, while IT workers manage naming of panel designations.

With Bluetooth connectivity, the naming of circuit breakers can be taken care of at the point-of-impact, bringing together the efforts of facilities and IT for more accurate panel names.

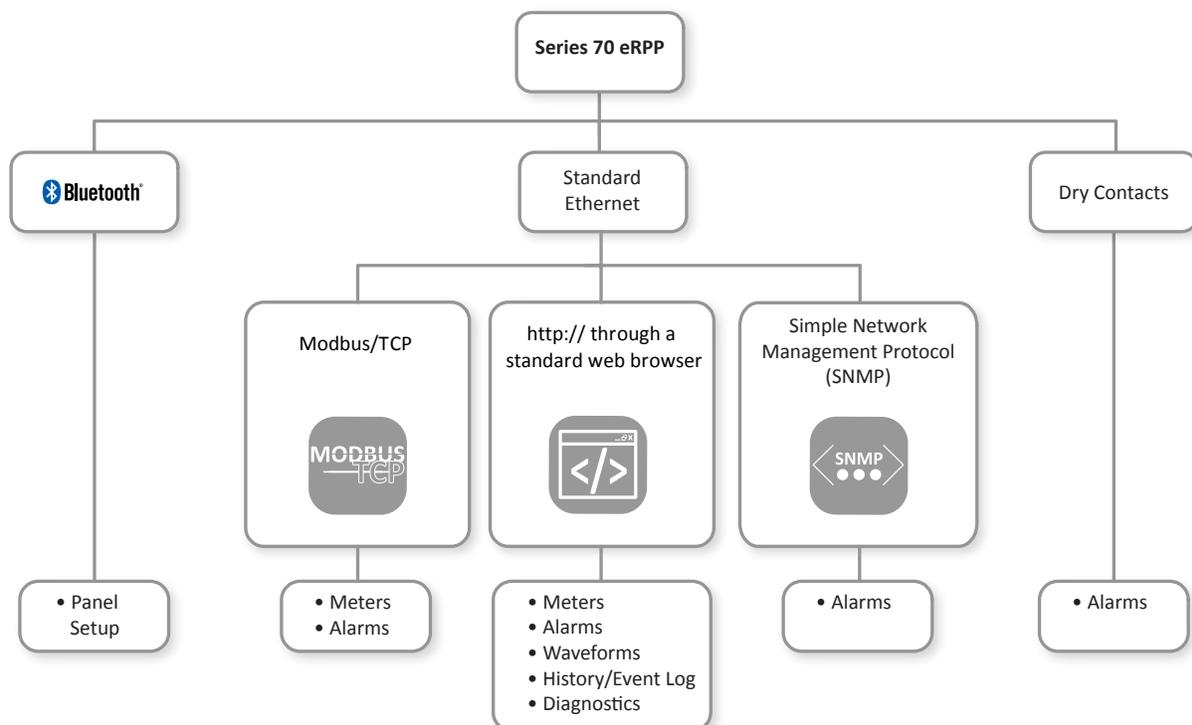

# zen DPQM


The Series 70 eRPP-SL2 is equipped with Zen DPQM (Distribution Power Quality Monitoring), an all encompassing monitoring system with local and remote communications options.

From basic monitoring & alarm reporting, to advanced power quality monitoring functionality, Zen DPQM provides a wide-range of options to help you be aware, be vigilant, be proactive in your quest to create a safe, stable and reliable operation.



## Zen DPQM Provides Answers

Zen DPQM provides timestamped pictures of waveforms before and after events, providing information that enables facilities to go back in time to methodically identify and correct the root causes of events. Zen actively captures power quality information at the STS, PDU, and RPP - permitting thorough post-event analysis.

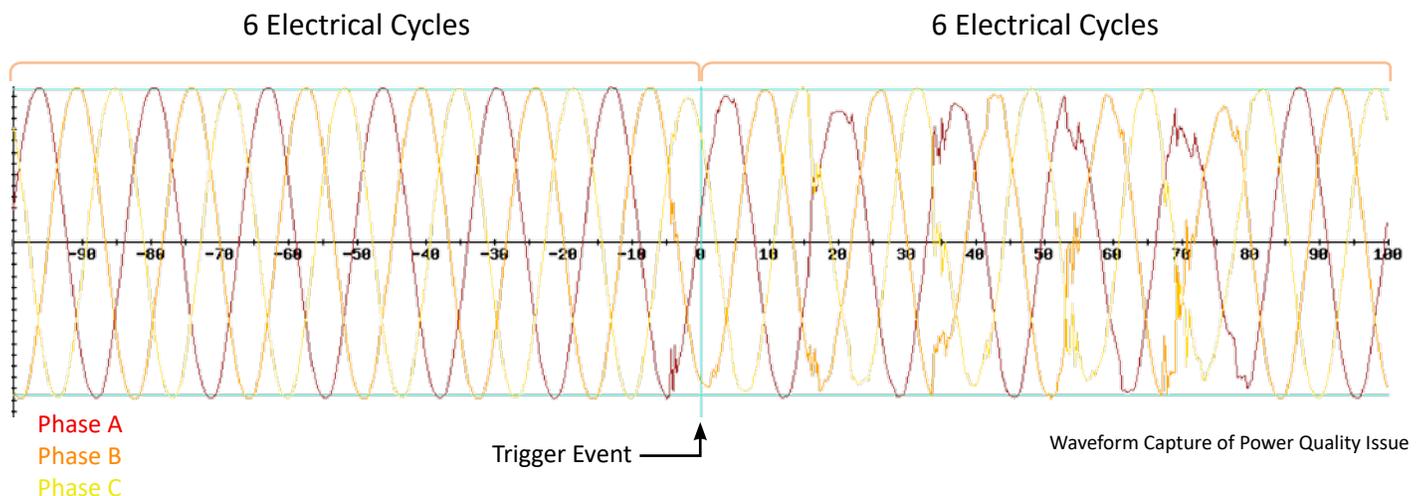

## Technical Specifications



Zen DPQM Parameters		Mains	Subfeeds or Branch Circuits
<b>Voltage Monitor</b>	Volts (L-L) Phase A/B/C (volts RMS)	✓	
	Volts (L-N) Phase A/B/C (volts RMS)	✓	
	Phase Rotation	✓	
<b>Current Monitor</b>	CT Reversed Phase A/B/C/N	✓	✓
	Current Phase A/B/C/N (amperes RMS)	✓	✓
<b>Power Monitor</b>	Frequency (hertz)	✓	
	Real Power (kilowatts)	✓	✓
	Apparent Power (kilovolt-amperes)	✓	✓
	Reactive Power (kilovolt-amperes reactive)	✓	✓
	Power Factor	✓	✓
	Energy (kilowatt-hours)	✓	✓
	Block Demand (kilowatts)	✓	✓
	Block Demand Peak (kilowatts)	✓	✓
	Rolling Demand (kilowatts)	✓	✓
<b>Power Quality</b>	Percent VTHD (percent)	✓	✓
	Waveform Capture	✓	✓
<b>Alarms</b>	Phase - Under Voltage A/B/C (Alarm)	✓	
	Phase - Over Voltage A/B/C (Alarm)	✓	
	Phase - Low Voltage A/B/C (Warning)	✓	
	Phase - High Voltage A/B/C (Warning)	✓	
	Phase - Over Current A/B/C (Alarm)	✓	✓
	Phase - High Current A/B/C (Warning)	✓	✓
	Under Frequency (Alarm)	✓	
	Over Frequency (Alarm)	✓	
	High VTHD (Warning)	✓	
	Over VTHD (Alarm)	✓	
	Phase Rotation (Alarm)	✓	

All product specifications are subject to change without notice.

**eRPP-SL2 Models with System Withstand Ratings**

120/208 V, 3-phase, 4-wire + Ground	35 kA
220/380 V, 3-Phase, 4-Wire + Ground	
230/400 V, 3-Phase, 4-Wire + Ground	14 kA
240/415 V, 3-Phase, 4-Wire + Ground	
277/480 V, 3-Phase, 4-Wire + Ground	
480 V, 3-Phase, 3-Wire + Ground	

**Mechanical Characteristics**

Dimensions	24"W x 93"H x 12"D (610 mm x 2362 mm x 305 mm)
Weight	550 lbs (250 kg)
Enclosure Mounting	Free-Standing, Wall-Mounted
Mounting Clustering	Single-Mount, Double (Back-To-Back), Double (Side-To-Side), Triple (Back-To-Back + Single Side), Quadruple (Back-to-Back + Two Sides)
Frame Construction	Welded Frame
Internal Electrical Connections	Flexible Laminated Bus, Silver-Plated Solid Busbar
Color	Textured Powder Coat White (RAL 7035), Blue (RAL 5017), Black, Custom
Seismic Floor Anchors	Optional
Seismic Floor Stand	Optional
Sectionalization	Engineered Composite Insulation, Dead Front Doors
Circuit Breaker Identification	Labels Viewable Through Polycarbonate Window

**Electrical Characteristics**

Input Voltage	120/208 V, 3-phase, 4-wire + Ground; 220/380 V, 3-Phase, 4-Wire + Ground; 230/400 V, 3-Phase, 4-Wire + Ground; 240/415 V, 3-Phase, 4-Wire + Ground; 277/480 V, 3-Phase, 4-Wire + Ground; 480 V, 3-Phase, 3-Wire + Ground
Circuit Breaker Mounting Type	Fixed, Plug-In
Frequency	50 Hz, 60 Hz
Poles	3-pole, 4-pole
Input Feeder Termination	Two-Hole, Compression Nema Hole Pattern; Single Mechanical; Dual Mechanical
Neutral Rating	100%, 200%
Number of Output CBs	84-Circuit
Distribution	SafePanel™ Distribution

**Power Quality Monitoring**


Power Quality Monitoring Technology	Zen DPQM™ (Distribution Power Quality Monitoring)
Waveform Capture	Local Display, Remote Display via Web Browser

All product specifications are subject to change without notice.

## Technical Specifications

Operational Characteristics	
Cooling	Convection Cooling
Cable Access	Top/Bottom
Service Access	Front and Top Only Access
IR Scan Port Type	InSight™ IR Portholes on Input
Display Type	3.2" LCD with Membrane,
Connectivity	
Meters	Local Display, Ethernet, Modbus/TCP, http via Web Browser (Non-Proprietary)
Alarms	Local Display, Ethernet, Modbus/TCP, http via Web Browser (Non-Proprietary)
Summary Alarm	Dry Contacts
Waveforms	Local Display, Ethernet, http via Web Browser (Non-Proprietary)
History/Event Log	Local Display, Ethernet, http via Web Browser (Non-Proprietary)
Diagnostics	Local Display, Ethernet, http via Web Browser (Non-Proprietary)
Time Synchronization	Network Time Protocol (NTP)
Standards Conformance	
UL	ETL and cETL listed to UL 60950, UL 67
CSA	CSA 22.2

All product specifications are subject to change without notice.



Learn more at [www.LayerZero.com](http://www.LayerZero.com)



LayerZero Power Systems, Inc.  
1500 Danner Drive  
Aurora, OH 44202 U.S.A.

© 2019 LayerZero Power Systems, Inc.

LayerZero Power Systems, LayerZero.com and the LayerZero logo are registered trademark of LayerZero.  
All product specifications are subject to change without notice.

Rev. 4/19