


Series 70 eSTS

4000A, 2-source, 3-pole, 3-wire, 100kA, TMR

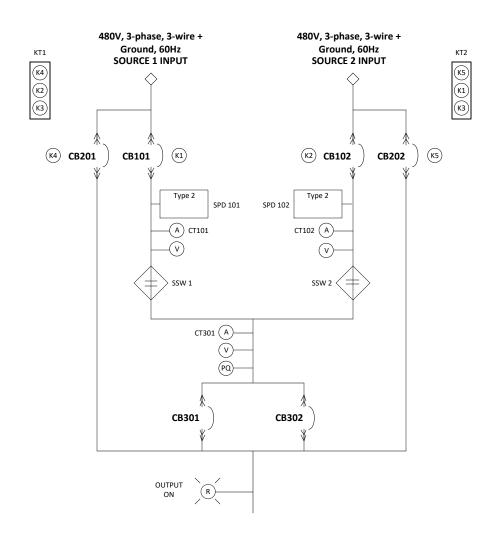

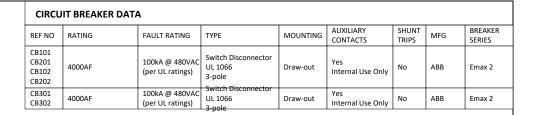

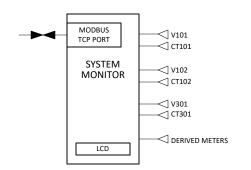

NOTE:

APPR

REFER TO THE MECHANICAL OUTLINE DRAWING FOR INFORMATION ON THE CUSTOMER CONNECTION TERMINALS.


LEGEND					
(A) C	URRENT METERING	6 POINT	K#)	KIRK KEY (INTERNAL TO	CB)
(V) V	OLTAGE METERING	LTAGE METERING POINT		KIRK KEY TRANSFER BLO	CK
PQ P	OWER QUALITY ME	TERING POINT	(K#) (K#)		
	LAYER		P	AGE DESCRIPTION	
POWER SYSTEMS, INC.			О	ONE LINE DIAGRAM, eSTS	
JOB	DRAWN	DATE 8/9/2023	D	WG NO	REV
LZ-10767	СНК	DATE		94-ES-10767-1	A

SHEET 1 OF 2


DATE

CUSTOMER INTERFACE BOARD (CIB)

EXTERNAL CONTROL CONTACTS

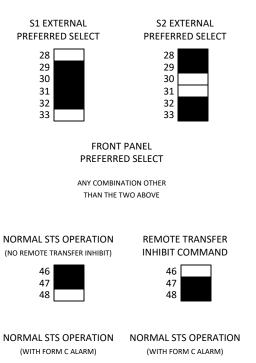

SYMBOL FOR CLOSED CONTACTS J2

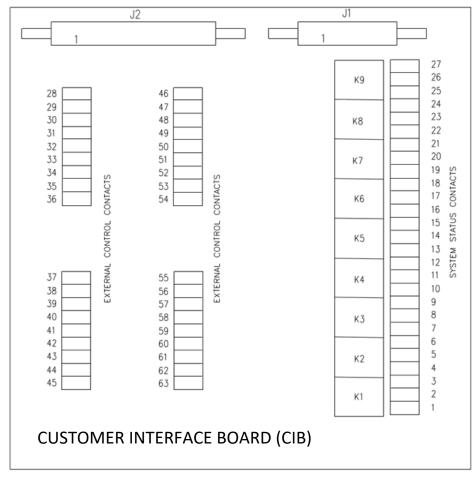

NOTES:

- 1. TERMINAL NUMBERS REFER TO TERMINALS ON CUSTOMER INTERFACE BOARD (CIB), REFER TO THE MECHANICAL OUTLINE DRAWING FOR EXACT LOCATION OF THE CIB AND CUSTOMER WAN.
- 2. TERMINALS SUITABLE FOR AWG 20-16 STRANDED COPPER WIRE. MAXIMUM ONE WAY LENGTH FOR #16: 500 ft (152 m).
- 3. ALL WIRING TO BE IN ACCORDANCE WITH THE NATIONAL ELECTRIC CODE AND ALL LOCAL CODES. CONTROL AND STATUS WIRING MUST BE RUN AND IN SEPARATE CONDUIT FROM POWER WIRING.
- 4. SYSTEM STATUS OUTPUTS ARE DRY, POTENTIAL-FREE
- CONTACTS. CUSTOMER REQUIREMENTS ARE AS FOLLOWS:
- a. Circuit voltage V < 250 V AC with current I < 12 A RMS, power factor = 1.0.
- b. Circuit voltage V < 200 V DC with current I < 0.4 A.
- 5. SYSTEM CONTROL INPUTS READ COMMANDS FROM EXTERNAL CONTACTS. CUSTOMER REQUIREMENTS ARE AS FOLLOWS:
 - a. Dry, potential-free contacts.
 - b. Form C
- c. Contacts are to be capable of switching 24 V DC at 5 mA < I < 10 mA.


SYSTEM STATUS CONTACTS

NORMAL STS OPERATION	REMOTE TRANSFER INHIBIT		
(NO REMOTE TRANSFER INHIBIT)	COMMAND RECEIVED		
24	24		
23	23		
22	22		
	· 		

OUNCE 2 FAILURE	SOURCE 2 AVAILAB		
18	18		
17	17		









SUMMARY ALARM		NO SUMMARY ALARM		
3 2		3 2		

🔀 LayerZero			PAGE DESCRIPTION	
POWER SYSTEMS, INC.			ONE LINE DIAGRAM, eSTS	
JOB	DRAWN	DATE 8/9/2023	DWG NO	REV
LZ-10767	СНК	DATE	94-ES-10767-1	Α
	APPR	DATE	SHEET 2 OF 2	