



**LAYERZERO**  
POWER SYSTEMS, INC.

The Foundation Layer

## Series 70 ePODs: Type-X

750 kVA Power Distribution Unit



Product Brochure

# The LayerZero ePODs: Type-X PDU Maximizes Operator Safety

## ePODs Type-X Is Inspired by NFPA-70E

The Series 70 ePODs: Type-X is a Power Distribution Unit for industrial applications with high reliability requirements. It features an NFPA 70E friendly design, sectionalized layout, and the IP-20 rated Finger-Safe SafePanel, to help protect operators and ensure safe operation. With an emphasis on reliability, safety, power quality monitoring, and connectivity, the Series 70 ePODs: Type-X provides high-reliability power distribution. The Series 70 ePODs: Type-X is designed to be easy to work with, to minimize risk during installation, ideal for growing or constantly changing environments.



## LayerZero's ePODs: Type-X Product Features

### Reliability

- ✓ **Silver Plated Input Terminals:** Silver Has Excellent Conductivity To Provide Superior Electrical Performance and Reliability
- ✓ **Machined Hardware:** Machined Cap Screws and Engineered Disc Springs Maintain Constant Torque Throughout Product Life
- ✓ **Screw Thread Inserts:** Prevents Screws From Loosening Under Vibration For Long-Term Reliability
- ✓ **Convection Cooling:** Natural Convection-Cooled Heat Dissipation System is Maintenance-Free
- ✓ **Serialized Critical Board Tracking:** Critical Boards Are Serialized And Cataloged in an Active Database For Traceability
- ✓ **Transformer Vibration Isolation:** Vibro-Elastic Pads to Absorb Vibrations from the Transformer

### Safety

- ✓ **Sectionalized Components:** Separations Between Each Section To Maintain Ximum Operator Safety
- ✓ **Polycarbonate Windows:** Allows Circuit Breaker Positions To Be Viewed With The Dead-Front Door Closed
- ✓ **Dead Front Hinged Doors:** Barrier To Provide A Safe Working Area With No Exposed Live Parts
- ✓ **Guided Wireways:** Helps Keep Wires Organized

### Connectivity

- ✓ **Ethernet Connectivity:** Secure VPN Router Connects To Network For Advanced Remote Monitoring Capabilities
- ✓ **Modbus/TCP:** Open Connectivity to Existing Monitoring Systems Without Proprietary Limitations
- ✓ **NTP Time Clock Synchronization:** Facilitates Timeline-Based Logging For Post-Event Reconstruction
- ✓ **SNMP Connectivity:** Permits Remote Management Via Simple Network Management Protocol
- ✓ **Bluetooth Connectivity:** Wirelessly Set Up Panels At The Point-Of-Impact


### zenDPQM

- ✓ **Real-Time Waveform Capture:** Automatically Captures A Picture Of The Power Six-Cycles Before and After Every Event
- ✓ **Optional Local Touch-Screen Interface:** Password-Protected Color Touch-Screen GUI For Local ePODs Setup/Operation
- ✓ **Black-Box Forensics:** ePODs Captures and Records Events To Provide Vital Information In Root-Cause Analysis

Equipment Layout




- 1. Hinged Dead Front Doors
- 2. Epoxy Coated Buswork
- 3. Fuse Panel
- 4. Transformer
- 5. Transformer Vibration Isolation Mounts
- 6. Zen DPQM Controls
- 7. Bluetooth Connectivity
- 8. Louvered Convection Cooled Intake

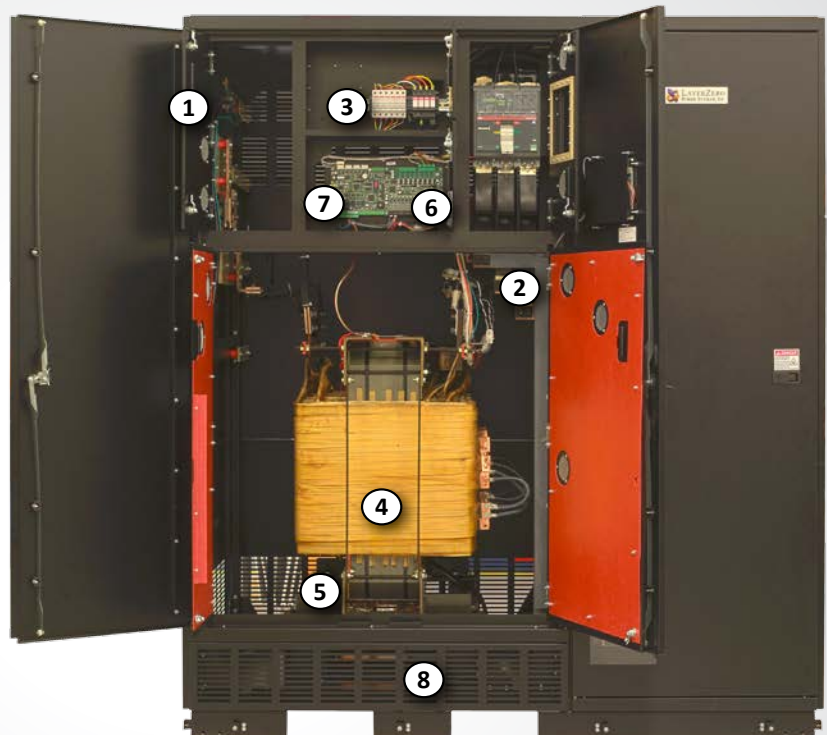

Equipment Construction Detail


- 1. Hinged Dead Front Doors
- 2. Silver Plated Terminals
- 3. Subfeed Circuit Breakers
- 4. Guided Wireways/Cable Organization Clips
- 5. Polycarbonate Windows to View CB Positions
- 6. Circuit Breaker Directory Card
- 7. Zen DPQM CTs
- 8. Color Touch Screen GUI

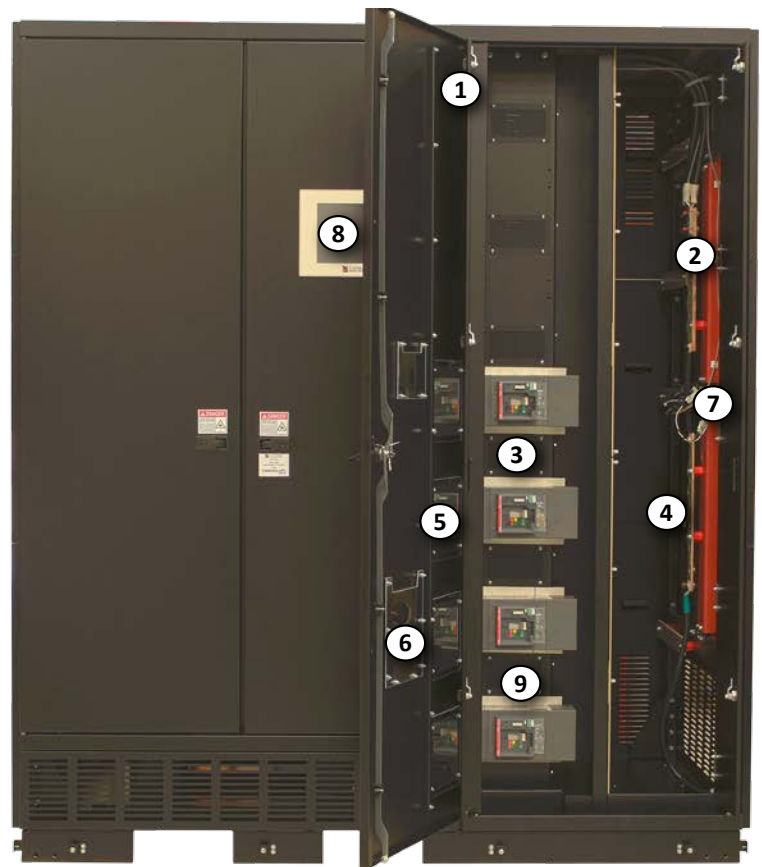

## Reliability Features

### Silver Plated Terminals

LayerZero utilizes silver plating on all input terminals to be able to provide the highest performance. Silver has high conductivity and low resistance - which makes for a great contact.

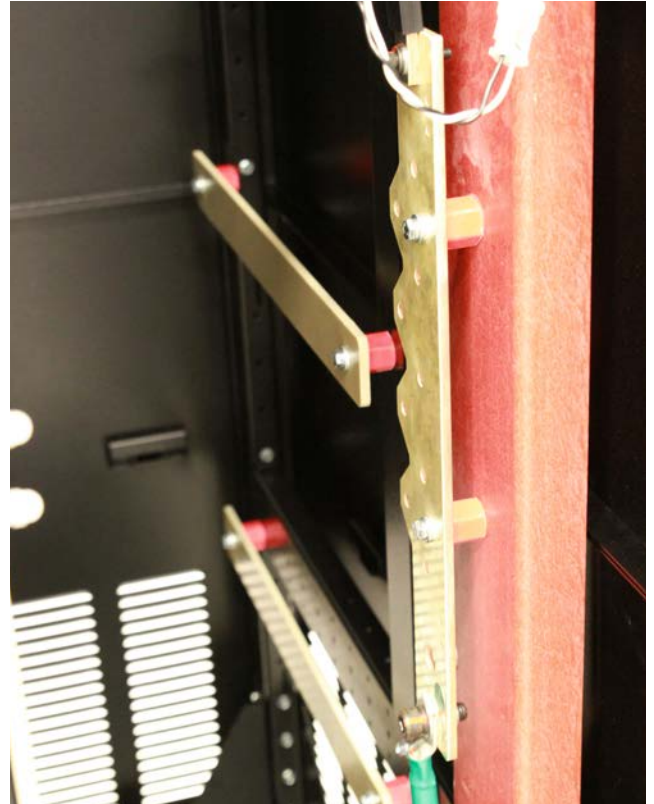

### Serialized Circuit Boards

We serialize and track all critical circuit boards and memory cards through our eBOSS portal, which allows customers to reference which components their machines are made from, who tested the components, as well as the ability to view notes generated from testing.


Serialized components offer the ability to drill-down on prospective component failure utilizing predictive modeling techniques, so if part fails, the instance can be cross-referenced with similar parts. This preventative maintenance helps ensure Ximum uptime.



## Reliability Features

### Vibration Isolation Damper Mounts

Transformers in the Series 70: ePODs Type-X Power Distribution Unit are equipped with vibration isolation damper mounts, helping to reduce the amount of vibration and noise that originates from Transformers, ultimately leading to a higher reliability of electrical and mechanical connections over the life of the product.

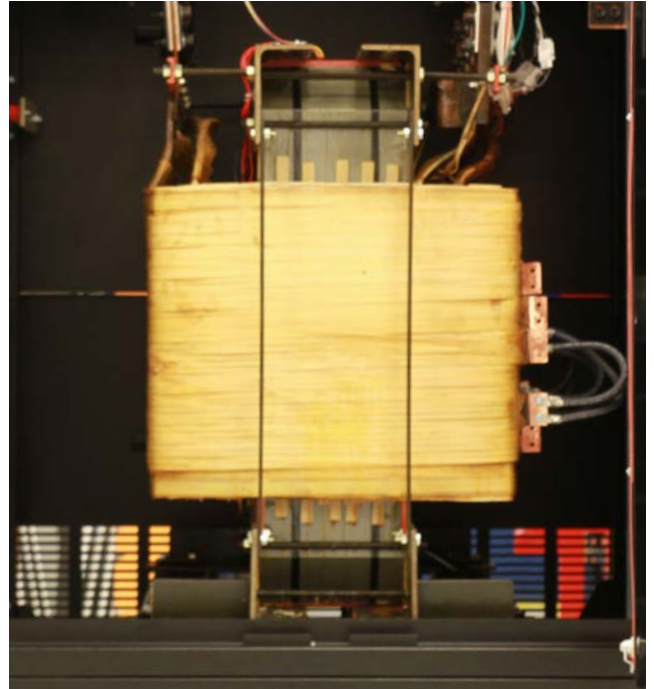

### View Status LEDs and Distribution CB Positions With Dead-Front Doors Closed

Our Series 70 product line was inspired by NFPA-70E, to help data centers drastically reduce the risks of their energy distribution systems.

Operators can view the status of diagnostic LEDs without exposure to the energized power electronics section. In addition, SafePanel circuit breaker positions can be viewed with the dead-front door closed.




Connectivity Options

Bluetooth Keeps Circuit Level Information Up-To-Date

Coordinate efforts to keep panel board naming conventions accurate and up-to-date with Bluetooth connectivity. In critical facilities, Facilities typically install the physical circuit breakers, while IT workers manage naming of panel designations.

With Bluetooth connectivity, the naming, size, and assignment of circuit breakers can be taken care of at the point-of-impact, bringing together the efforts of facilities and IT for more accurate deployment.

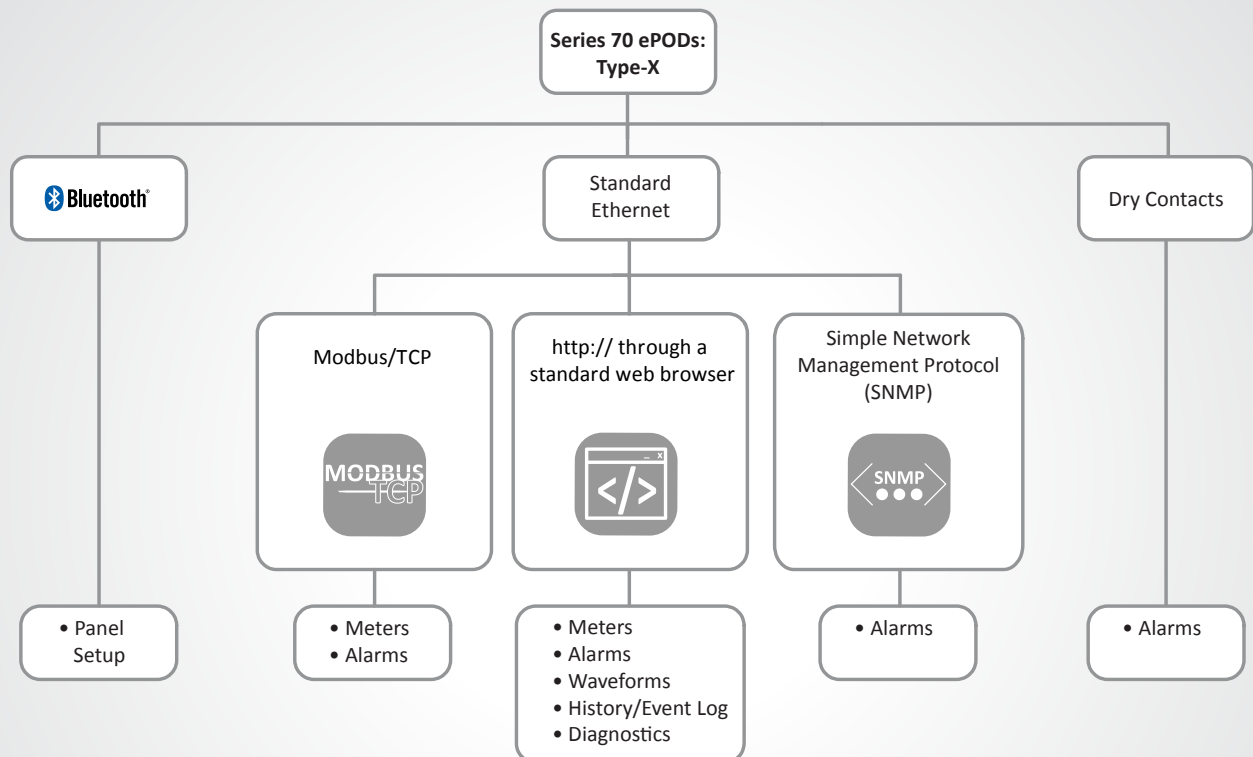



Power Quality Monitoring

# zen DPQM


The Series 70 ePODs: Type-X is equipped with Zen DPQM (Distribution Power Quality Monitoring), an all encompassing monitoring system with local and remote communications options.

From basic monitoring & alarm reporting, to advanced power quality monitoring functionality, Zen DPQM provides a wide-range of options to help you be aware, be vigilant, be proactive in your quest to create a safe, stable and reliable operation.



## Zen DPQM Provides Answers

Zen DPQM provides timestamped pictures of waveforms before and after events, providing information that enables facilities to go back in time to methodically identify and correct the root causes of events. Zen actively captures power quality information at the STS, PDU, and RPP - permitting thorough post-event analysis.

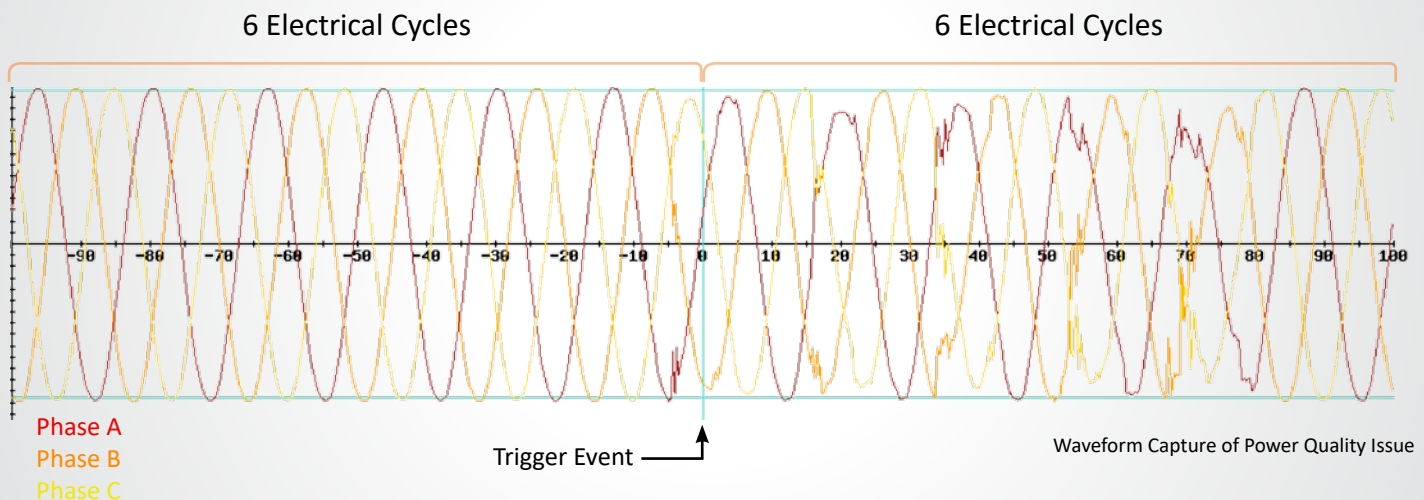

Technical Specifications



Zen DPQM Parameters		Mains	Subfeeds or Branch Circuits
Voltage Monitor	Volts (L-L) Phase A/B/C (volts RMS)	✓	
	Volts (L-N) Phase A/B/C (volts RMS)	✓	
	Phase Rotation	✓	
Current Monitor	CT Reversed Phase A/B/C/N	✓	✓
	Current Phase A/B/C/N (amperes RMS)	✓	✓
Power Monitor	Frequency (hertz)	✓	
	Real Power (kilowatts)	✓	✓
	Apparent Power (kilovolt-amperes)	✓	✓
	Reactive Power (kilovolt-amperes reactive)	✓	✓
	Power Factor	✓	✓
	Energy (kilowatt-hours)	✓	✓
	Block Demand (kilowatts)	✓	✓
	Block Demand Peak (kilowatts)	✓	✓
	Rolling Demand (kilowatts)	✓	✓
	Rolling Demand Peak (kilowatts)	✓	✓
Power Quality	Percent VTHD (percent)	✓	✓
	Waveform Capture	✓	✓
Alarms	Phase - Under Voltage A/B/C (Alarm)	✓	
	Phase - Over Voltage A/B/C (Alarm)	✓	
	Phase - Low Voltage A/B/C (Warning)	✓	
	Phase - High Voltage A/B/C (Warning)	✓	
	Phase - Over Current A/B/C (Alarm)	✓	✓
	Phase - High Current A/B/C (Warning)	✓	✓
	Under Frequency (Alarm)	✓	
	Over Frequency (Alarm)	✓	
	High VTHD (Warning)	✓	
	Over VTHD (Alarm)	✓	
	Phase Rotation (Alarm)	✓	

All product specifications are subject to change without notice.


## Technical Specifications

Mechanical Characteristics	
Dimensions	Type-X 48" W x 90" H x 36" D (1219 mm H x 2235 mm H x 914 mm D)
Heat Dissipation	Varies on transformer efficiency
Weight	2,450 lbs (1111 kg) - 3,900 lbs (1769 kg)
Frame Construction	Welded Frame
Color	Textured Powder Coat White (RAL 7035), Blue (RAL 5017), Black, Custom
Seismic Floor Anchors	Optional
Seismic Floor Stand	Optional
Sectionalization	Dead Front Doors; Main CB(s); Monitoring; Transformer
Electrical Characteristics	
Input Voltages	480 V; 575 V; 600 V
Output Voltages	120/208 V; 240/415 V
Transformer Size	750 kVA
Frequency	60 Hz
Neutral Rating	100%, 200%
Distribution	NELP Configuration (No Exposed Live Parts)
Power Quality Monitoring	
Power Quality Monitoring Technology	Zen DPQM™ (Distribution Power Quality Monitoring)
Waveform Capture	Local Display, Remote Display via Web Browser


Operational Characteristics	
Cooling	Convection Cooling
Cable Access	Top/Bottom
IR Scan Port Type	InSight™ IR Portholes
Display Type	3.2" LCD with Membrane, 10.5" Color Touch Screen GUI (Optional)
Connectivity	
Meters	Local Display, Ethernet, Modbus/TCP, http via Web Browser (Non-Proprietary)
Alarms	Local Display, Ethernet, Modbus/TCP, http via Web Browser (Non-Proprietary)
Summary Alarm	Dry Contacts
Waveforms	Local Display, Ethernet, http via Web Browser (Non-Proprietary)
History/Event Log	Local Display, Ethernet, http via Web Browser (Non-Proprietary)
Diagnostics	Local Display, Ethernet, http via Web Browser (Non-Proprietary)
Time Synchronization	Network Time Protocol (NTP)

All product specifications are subject to change without notice.

Technical Specifications

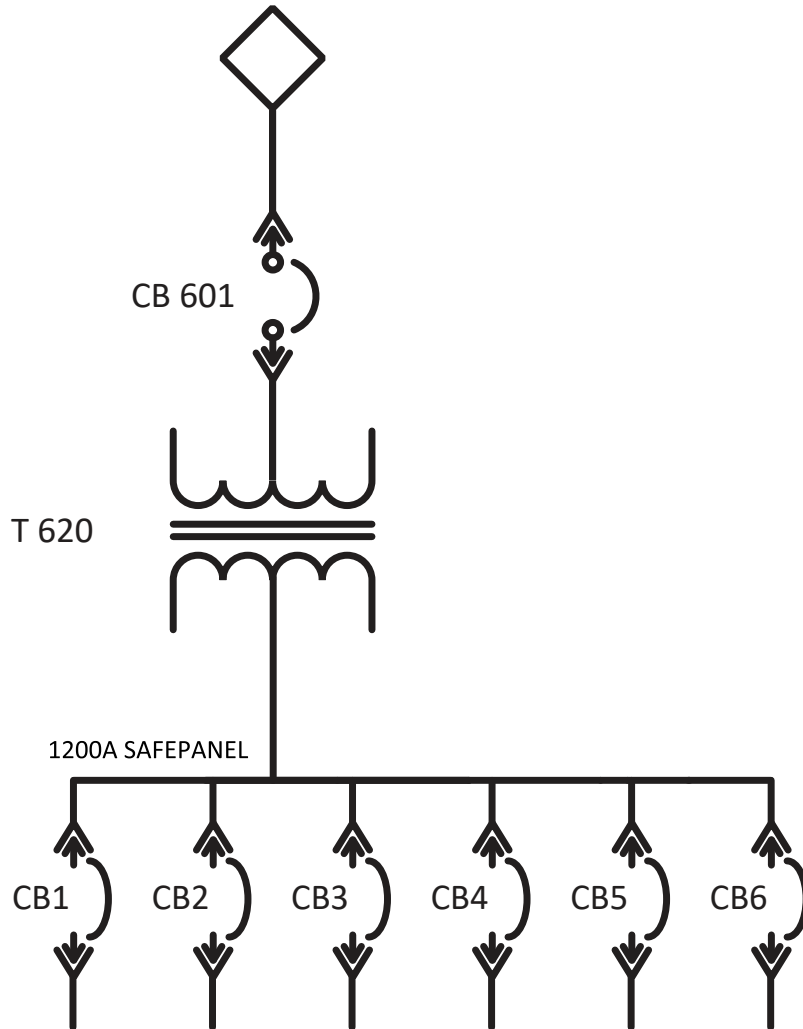

All product specifications are subject to change without notice.

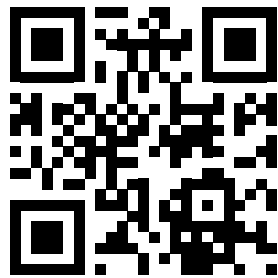

Learn more at [www.LayerZero.com](http://www.LayerZero.com)



LayerZero Power Systems, Inc.  
1500 Danner Drive  
Aurora, OH 44202 U.S.A.

© 2018 LayerZero Power Systems, Inc.

LayerZero Power Systems, LayerZero.com and the LayerZero logo are registered trademark of LayerZero.  
All product specifications are subject to change without notice.

Rev. 10/18 #9