



LAYERZERO
POWER SYSTEMS, LLC.

The Foundation Layer

Series 70 ePODs: Type-X PDU
400-500 kVa 480 V 120/208 V w/ SafePanel Subfeeds

Power Distribution Unit → Transformer → Subfeed Distribution




Product Brochure

The LayerZero ePODs: Type-X PDU Maximizes Operator Safety

ePODs Type-X Is Inspired by NFPA-70E

The Series 70 ePODs: Type-X is a Power Distribution Unit designed for critical industries. It features an NFPA 70E-friendly design, a sectionalized layout, and the IP-20 rated Finger-Safe SafePanel® to help protect operators and ensure safe operation. With a focus on reliability, safety, power quality monitoring, and connectivity, the Series 70 ePODs: Type-X delivers high-reliability power distribution. It is built to be easy to work with, minimizing risk during installation, and is ideal for growing or constantly changing environments.

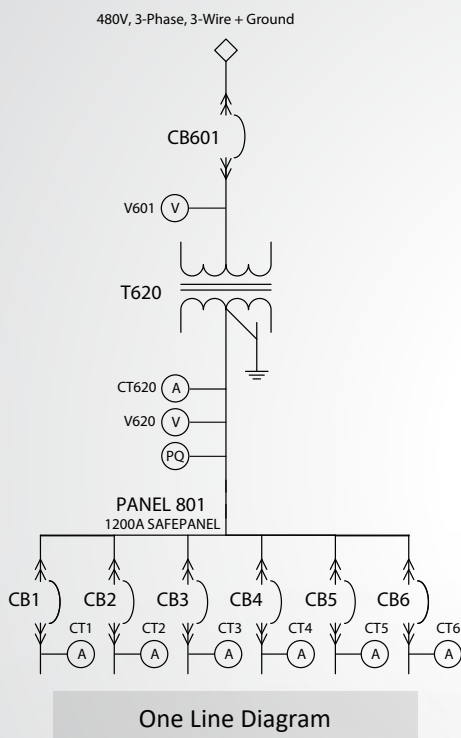

Reliability



Silver Plated Terminals:
Silver Has Excellent Conductivity To Provide Superior Electrical Performance and Reliability



Convection Cooling:
Natural Convection-Cooled Heat Dissipation System is Maintenance-Free



Machined Hardware:
Machined Cap Screws and Engineered Disc Springs Maintain Constant Torque Throughout Product Life



Transformer Vibration Isolation:
Vibro-Elastic Pads to Absorb Vibrations from the Transformer



Serialized Critical Board Tracking:
Critical Boards Are Serialized And Cataloged in an Active Database For Traceability

Safety



INSIGHT IR® Cameras:
Built-in Infrared Cameras to Continuously Scan Bolted Connections For Irregular Rises In Temperature



Sectionalized Components:
Isolated Sections That Can Be Safely De-Energized For Performing Maintenance



Polycarbonate Windows:
Allows Critical Board LEDs To Be Viewed With The Dead-Front Door Closed



Guided Wireways:
Helps Keep Wires Organized



Dead Front Hinged Doors:
Barrier To Provide A Safe Working Area With No Exposed Live Parts



SafePanel® Distribution:
IP-20 Rated Finger-Safe Panel Board with No Exposure to Exposed Live Parts

Connectivity

Ethernet Connectivity:
Secure VPN Router Connects To Network For Advanced Remote Monitoring Capabilities


Modbus/TCP:
Open Connectivity to Existing Monitoring Systems Without Proprietary Limitations

NTP Time Clock Synchronization:
Facilitates Timeline-Based Logging For Post-Event Reconstruction


SNMP Connectivity:
Permits Remote Management Via Simple Network Management Protocol

Dry Contacts:
Access Alarms Data with Dry Contacts Connections

Power Quality Monitoring



Real-Time Waveform Capture:
Automatically Captures A Picture Of The Power Six-Cycles Before and After Every Event



ITIC Plotting:
Generate ITIC Plots To Determine if Connected Equipment Was Affected by Power Quality Events



Local Touch-Screen Interface:
Password-Protected Color Touch-Screen GUI For Local STS Setup/Operation/ Administration

Equipment Layout

Main Circuit Breaker Section:

Auxiliary MCB optional
Mounting: Fixed, Plug-In
Type:
Molded Case Switch
65kA, 100kA
Electronic Trip
65kAIC, 100kAIC
Accessories:
CB Shunt-trip
120VAC, 24VDC
CB Position Indication:
Open, Tripped, Closed

Monitoring Section:


Color-Touch Screen Interface
Option
Local/Remote EPO Option

Distribution Section:

Sub-feed distribution
400A SafePanel™
1200A SafePanel™

Transformer Section:

DOE 2016 Efficiency
Standard

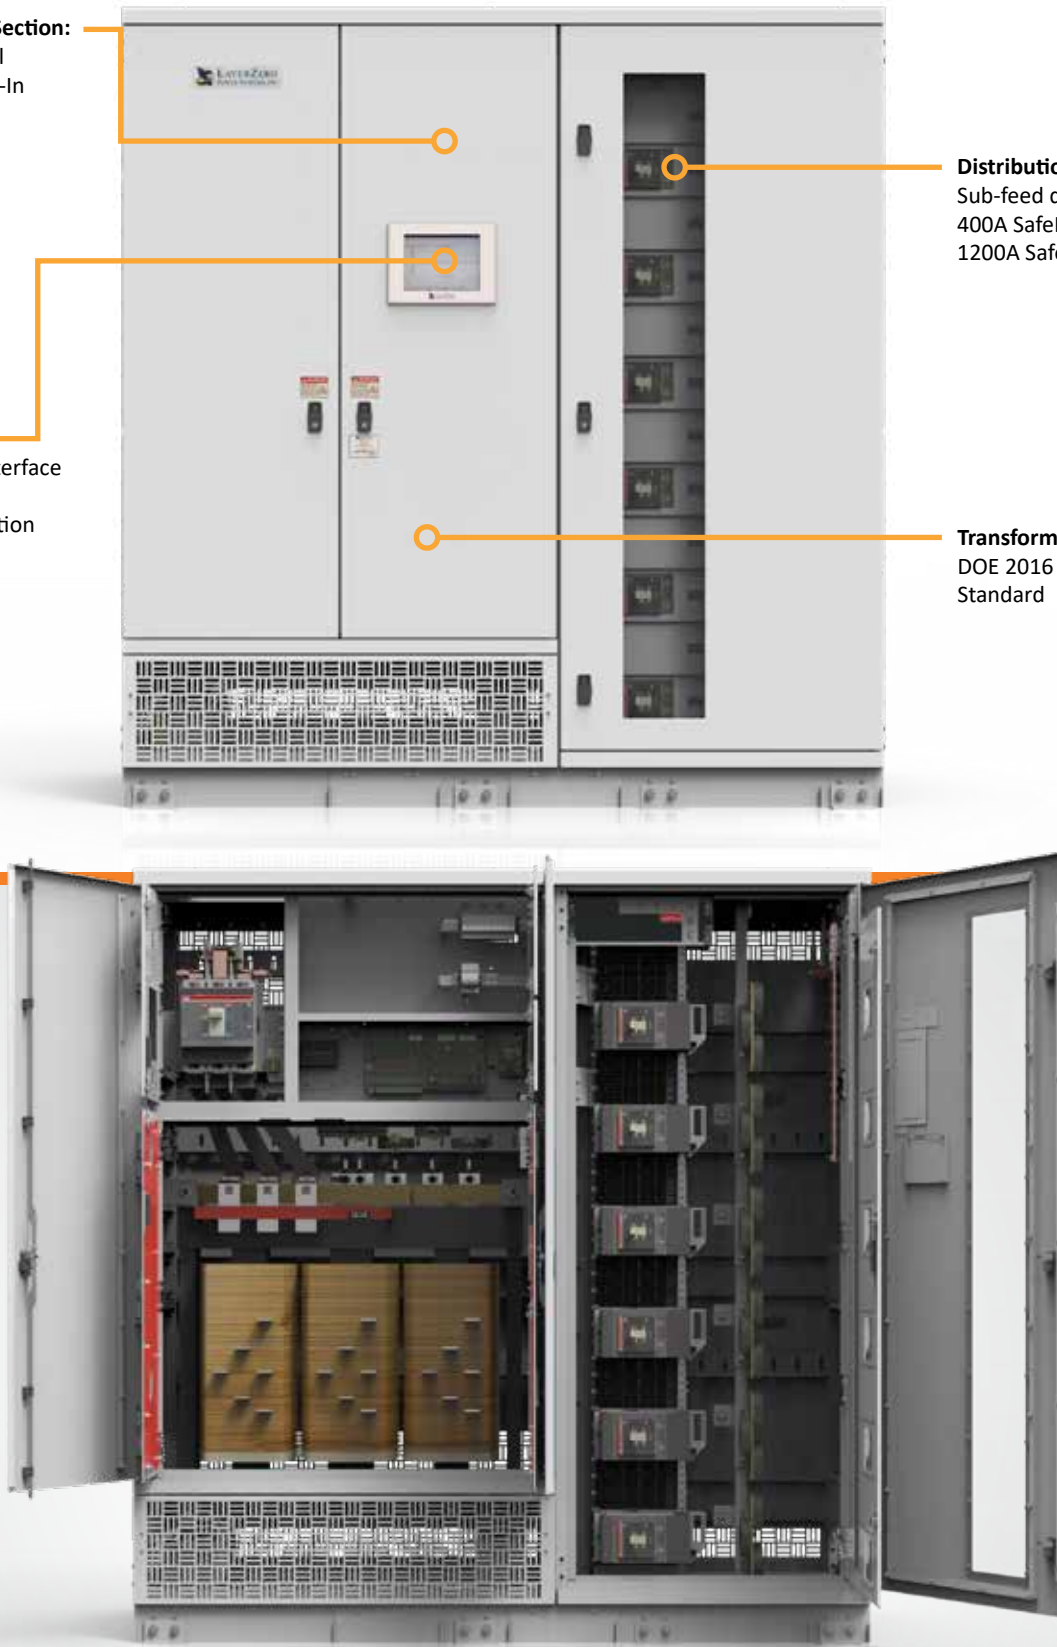

Reliability Features

Silver Plated Terminals

LayerZero uses silver plating on all input terminals to ensure the highest performance. With superior conductivity and low resistance, silver provides exceptionally reliable electrical contact.



Silver-Plated Customer Connections

Machined Hardware

Bolted connections are designed with machined cap screws and engineered disc springs. This creates a flat pressure vs. deflection profile, maintaining constant torque throughout the life of the product. These connections have been tested in wide temperature ranges to ensure that once they are tightened, they stay that way.



Machined Cap Screws and Engineered Disc Springs Utilized in LayerZero Power Systems Products

Convection Cooling

To address heat dissipation, LayerZero developed a natural convection-cooled system that is fully maintenance-free. This design eliminates common failure points by removing fans, filters, and fuses.

Advantages include:

- No nuisance alarms
- No filters to replace
- No fuses to replace
- Fuseless power train
- Fuseless control power architecture




Convection Cooling in a LayerZero ePODs Type-X PDU

Reliability Features

Serialized Circuit Boards

All critical circuit boards and memory cards are serialized and tracked through LayerZero’s eBOSS portal. This system allows customers to reference which components their machines contain, see who tested them, and review testing notes.

Serialized tracking also enables predictive maintenance. If a component fails, it can be cross-referenced with similar parts to identify trends and prevent future issues. This proactive approach maximizes uptime and reliability.

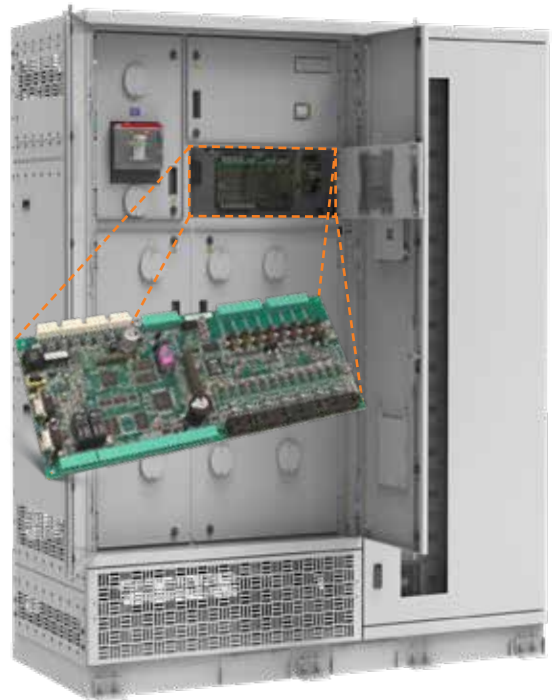

All circuit breakers in LayerZero products are serialized and tracked in an active database

Vibration Isolation Damper Mounts

The Series 70 ePODs: Type-X transformers are equipped with vibration isolation damper mounts. These mounts reduce vibration and noise at the source, ensuring electrical and mechanical connections remain stable and reliable throughout the life of the product.



Vibration Isolation Damper Mounts in an ePODs: Type-X PDU

Ease of Maintenance

Scan Bolted Connections with Dead-Front Doors Closed

Strategically placed IR-scan portholes allow safe thermal scanning of all bolted connections without opening the dead-front door. This eliminates operator exposure to power circuit voltage.


The IR window swivels upward and unlocks with keyhole access to reveal a mesh, enabling accurate thermal readings with a point-and-shoot camera. LayerZero also provides documentation to ensure proper thermal scanning procedures.



INSIGHT IR® Portholes allow operators to safely scan bolted connections without opening the dead front doors

De-Energizable Monitoring Section

For safer, easier maintenance, the ePODs: Type-X includes fuses that allow the LayerZero DPQM Panel Board Monitor to be safely replaced or upgraded without energizing the monitoring section.

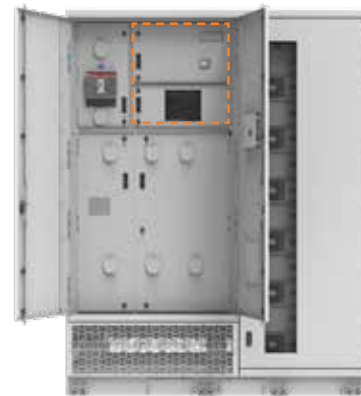

A sectionalized design allows operators to de-energize the monitoring section for maintenance

View Status LEDs and Distribution CB Positions With Dead-Front Doors Closed

Inspired by NFPA-70E, the Series 70 product line is designed to help data centers reduce electrical distribution risks. Operators can view diagnostic LED status indicators and SafePanel circuit breaker position with the dead-front door closed, ensuring maximum visibility without exposure to energized components.



The polycarbonate window in the subfeed distribution section.

Safety Features

The LayerZero 1200 A Finger-Safe SafePanel™

The LayerZero 1200 A SafePanel® Panel Board is designed with operator safety as the top priority. With no exposed live parts, it provides true finger-safe protection.

Optional shrouds can be included to cover unused spaces, further enhancing safety for operators.



The Breaker Is Inserted Into The SafePanel



The Handle Is Unlocked



Screws Help Secure The Breaker



For Maximum Safety, The SafePanel Has Recessed Bus Work And IP-20 Finger Safe Lattice.

Power Quality Monitoring




The Series 70 ePODs: Type-X is equipped with LayerZero DPQM, a comprehensive monitoring system with both local and remote communications.

From basic monitoring and alarm reporting to advanced power quality analysis, DPQM delivers the tools needed to stay aware, vigilant, and proactive in ensuring a safe, stable, and reliable operation.





LayerZero DPQM Provides Answers

LayerZero DPQM captures timestamped pictures of waveforms before and after events, allowing facilities to trace issues back to their root causes. Power quality information is actively recorded at the STS, PDU, and RPP, enabling thorough post-event analysis.

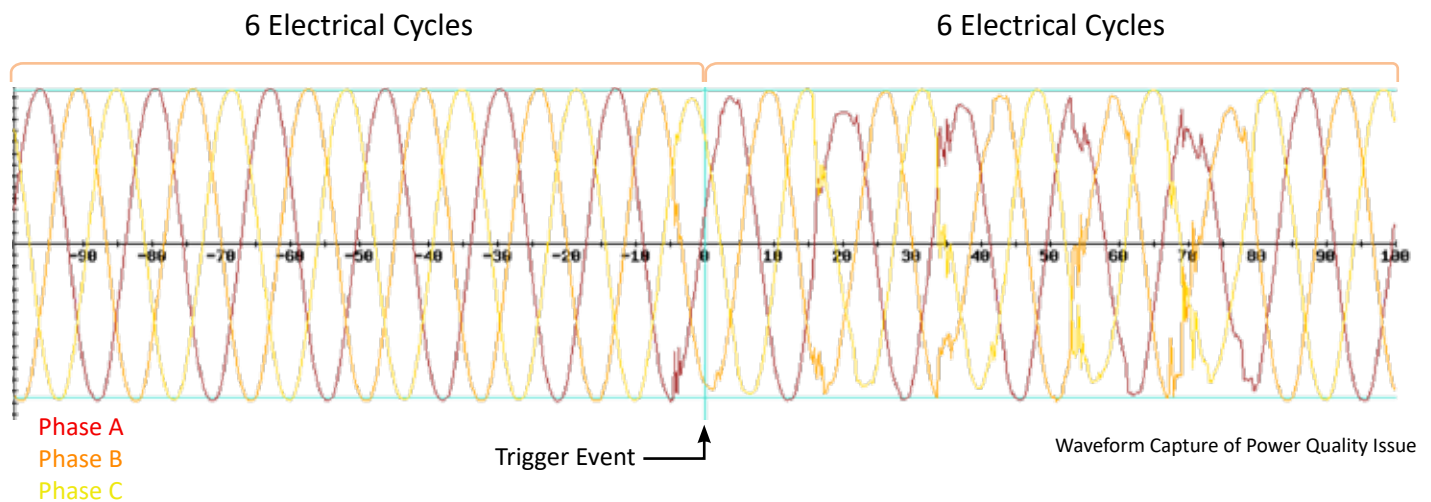

Specifications

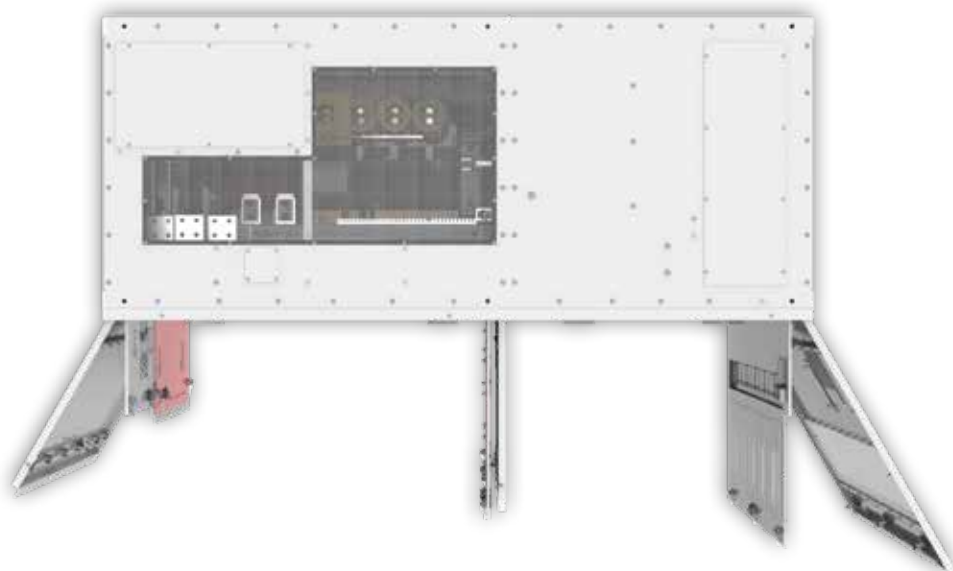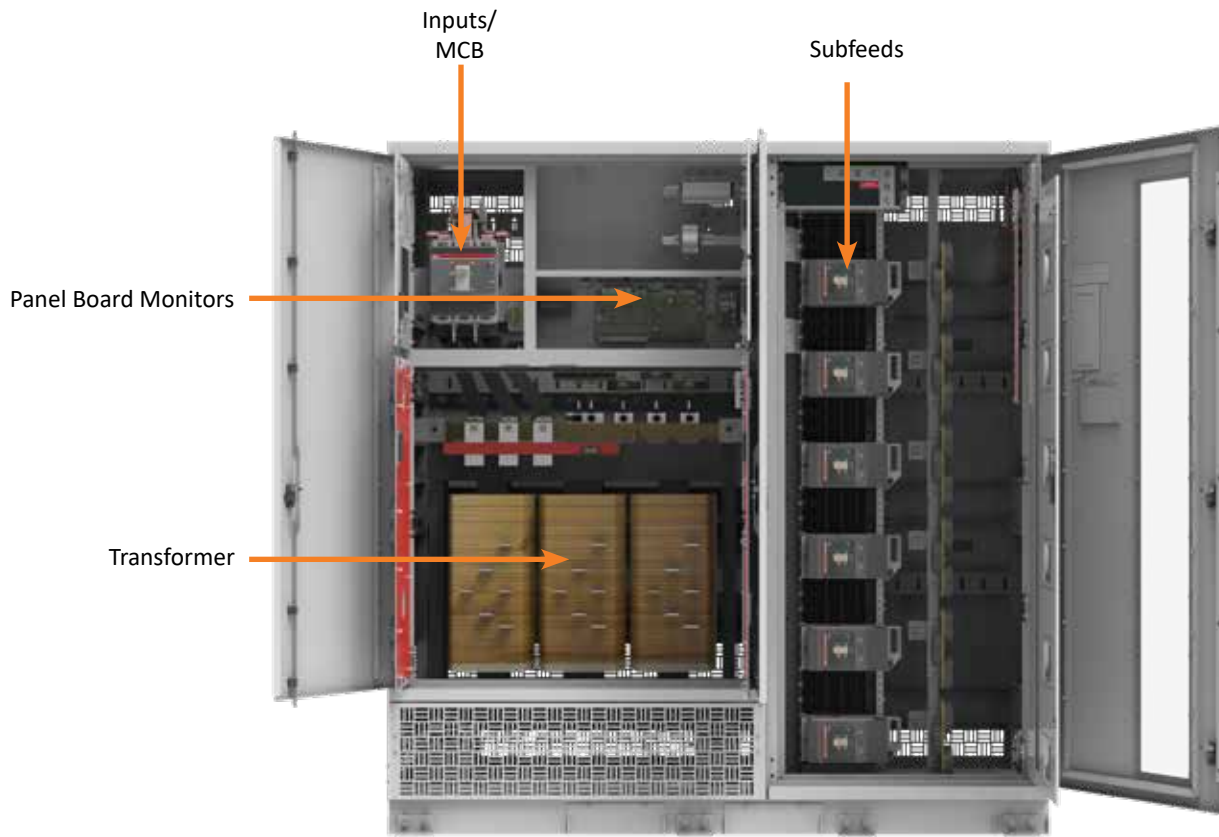


Generate Easy-To-Understand Power Quality Reports with ITIC Plotting

All LayerZero products break down power sources into samples for detailed power quality analysis. Data is remotely accessible via a secure web browser connection.

The factory test example below illustrates a voltage sag on a Series 70 ePODs: Type-X PDU. Each colored line represents a phase, plotting voltage over time. When all three phases dropped before the user-defined setpoint, the system automatically triggered:

- An undervoltage event
- Automatic waveform capture
- An ITIC plot of the event

On LayerZero PDUs and RPPs, waveforms and ITIC plots are generated for every phase, on every circuit, for every event, delivering complete visibility into system behavior.

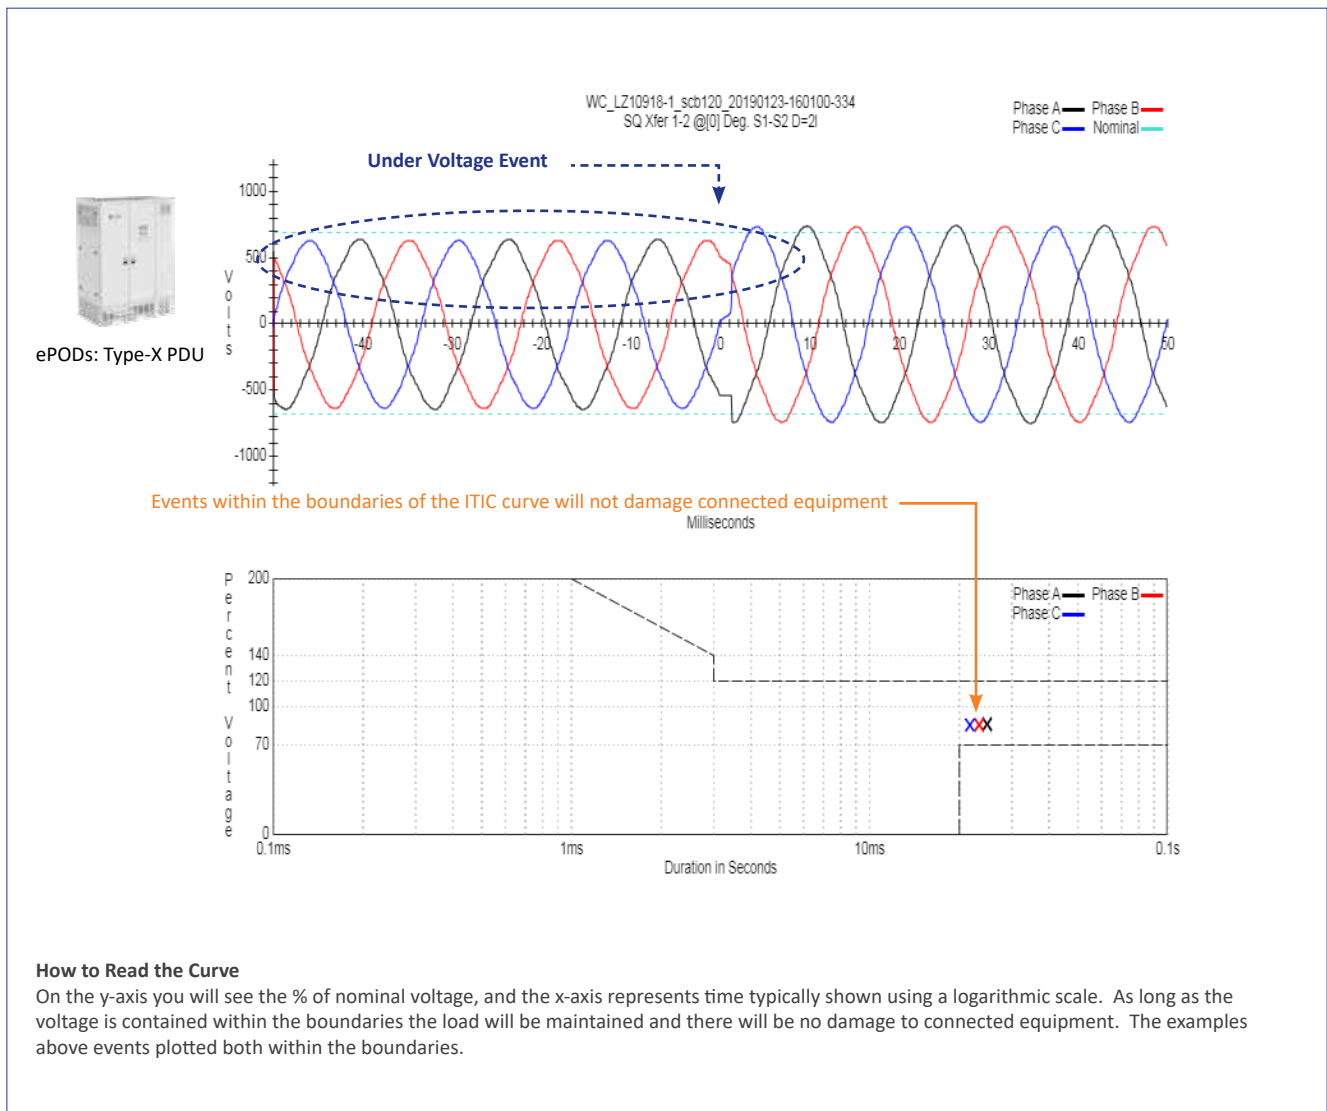

Technical Specifications




LayerZero DPQM Parameters		Mains	Subfeeds or Branch Circuits
Voltage Monitor	Volts (L-L) Phase A/B/C (volts RMS)	✓	
	Volts (L-N) Phase A/B/C (volts RMS)	✓	
	Phase Rotation	✓	
Current Monitor	CT Reversed Phase A/B/C/N	✓	✓
	Current Phase A/B/C/N (amperes RMS)	✓	✓
Power Monitor	Frequency (hertz)	✓	
	Real Power (kilowatts)	✓	✓
	Apparent Power (kilovolt-amperes)	✓	✓
	Reactive Power (kilovolt-amperes reactive)	✓	✓
	Power Factor	✓	✓
	Energy (kilowatt-hours)	✓	✓
	Block Demand (kilowatts)	✓	✓
	Block Demand Peak (kilowatts)	✓	✓
	Rolling Demand (kilowatts)	✓	✓
	Rolling Demand Peak (kilowatts)	✓	✓
Power Quality	Percent VTHD (percent)	✓	✓
	Waveform Capture	✓	✓
Alarms	Phase - Under Voltage A/B/C (Alarm)	✓	
	Phase - Over Voltage A/B/C (Alarm)	✓	
	Phase - Low Voltage A/B/C (Warning)	✓	
	Phase - High Voltage A/B/C (Warning)	✓	
	Phase - Over Current A/B/C (Alarm)	✓	✓
	Phase - High Current A/B/C (Warning)	✓	✓
	Under Frequency (Alarm)	✓	
	Over Frequency (Alarm)	✓	
	High VTHD (Warning)	✓	
	Over VTHD (Alarm)	✓	
	Phase Rotation (Alarm)	✓	


All product specifications are subject to change without notice.

Technical Specifications

Mechanical Characteristics	
Dimensions	Type-X 88" H x 84" W x 36" D (2235 mm H x 2133 mm W x 914.4 mm D)
Heat Dissipation	18,800-28,200 BTU/HR - Varies on Transformer Efficiency, Please Contact LayerZero Engineering.
Weight	1700-3625 lbs (771-1644 kg)- Varies on configuration, Please Contact LayerZero Engineering
Frame Construction	Welded Frame
Color	Textured Powder Coat White (RAL 7035), Blue (RAL 5017), Black, Custom
Seismic Floor Anchors	Optional
Seismic Floor Stand	Optional
Sectionalization	Dead Front Doors; Main CB(s); Monitoring; Transformer
Electrical Characteristics	
Input Voltages	480 V, 3-Phase, 3-Wire + Ground
Output Voltages	120/208 V, 3-phase, 4-wire + Ground
Transformer Size	500kVA
Frequency	60 Hz
Neutral Rating	100%, 200%
Distribution	SafePanel® Distribution
Power Quality Monitoring	
Power Quality Monitoring Technology	LayerZero DPQM (Distribution Power Quality Monitoring)
Waveform Capture	Local Display, Remote Display via Web Browser
Operational Characteristics	
Cooling	Convection Cooling
Cable Access	Top/Bottom
IR Scan Port Type	INSIGHT IR® Portholes
Display Type	3.2" LCD with Membrane, 10.5" Color Touch Screen GUI (Optional)
Connectivity	
Meters	Local Display, Ethernet, Modbus/TCP, http via Web Browser (Non-Proprietary)
Alarms	Local Display, Ethernet, Modbus/TCP, http via Web Browser (Non-Proprietary)
Summary Alarm	Dry Contacts
Waveforms	Local Display, Ethernet, http via Web Browser (Non-Proprietary)
History/Event Log	Local Display, Ethernet, http via Web Browser (Non-Proprietary)
Diagnostics	Local Display, Ethernet, http via Web Browser (Non-Proprietary)
Time Synchronization	Network Time Protocol (NTP)
Standards Conformance: SafePanel Distribution	
UL	ETL Listed to UL 60950
CSA	C22.2 No 29-M1989

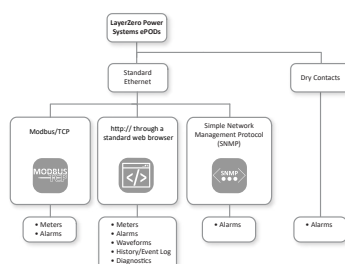

All product specifications are subject to change without notice.



Learn more at www.LayerZero.com



LayerZero Power Systems, LLC.
1500 Danner Drive
Aurora, OH 44202 U.S.A.

© 2026 LayerZero Power Systems, LLC.

[LayerZero](#)[®], INSIGHT IR[®], SAFEARM[®], SAFEPANEL[®], and LayerZero Power Systems, LLC.[®] are registered trademarks of LayerZero Power Systems, LLC. All Rights Reserved.

All product specifications are subject to change without notice.

Rev. 4/26 #13