



**LAYERZERO**  
POWER SYSTEMS, LLC.

The Foundation Layer

**Series 70 ePODs: Type-X PDU**  
**750 kVA 480 V 240/415V w/ SafePanel Subfeeds**

Power Distribution Unit → Transformer → Subfeed Distribution




Product Brochure

# The LayerZero ePODs: Type-X PDU

## Maximizes Operator Safety

### ePODs Type-X Is Inspired by NFPA-70E

The Series 70 ePODs: Type-X is a Power Distribution Unit designed for critical industries. It features an NFPA 70E-friendly design, a sectionalized layout, and the IP-20 rated Finger-Safe SafePanel® to help protect operators and ensure safe operation. With a focus on reliability, safety, power quality monitoring, and connectivity, the Series 70 ePODs: Type-X delivers high-reliability power distribution. It is built to be easy to work with, minimizing risk during installation, and is ideal for growing or constantly changing environments.

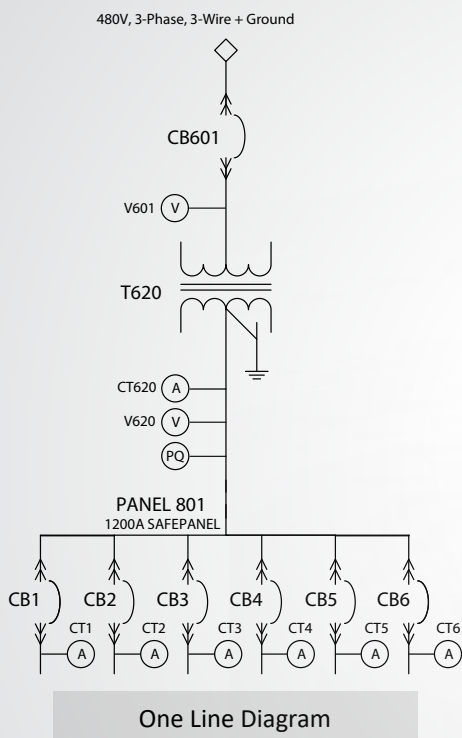

Reliability



**Silver Plated Terminals:**  
Silver Has Excellent Conductivity To Provide Superior Electrical Performance and Reliability



**Convection Cooling:**  
Natural Convection-Cooled Heat Dissipation System is Maintenance-Free



**Machined Hardware:**  
Machined Cap Screws and Engineered Disc Springs Maintain Constant Torque Throughout Product Life



**Transformer Vibration Isolation:**  
Vibro-Elastic Pads to Absorb Vibrations from the Transformer



**Serialized Critical Board Tracking:**  
Critical Boards Are Serialized And Cataloged in an Active Database For Traceability

Safety



**INSIGHT IR® Cameras:**  
Built-in Infrared Cameras to Continuously Scan Bolted Connections For Irregular Rises In Temperature



**Sectionalized Components:**  
Isolated Sections That Can Be Safely De-Energized For Performing Maintenance



**Polycarbonate Windows:**  
Allows Critical Board LEDs To Be Viewed With The Dead-Front Door Closed



**Guided Wireways:**  
Helps Keep Wires Organized



**Dead Front Hinged Doors:**  
Barrier To Provide A Safe Working Area With No Exposed Live Parts



**SafePanel® Distribution:**  
IP-20 Rated Finger-Safe Panel Board with No Exposure to Exposed Live Parts

Connectivity

**Ethernet Connectivity:**  
Secure VPN Router Connects To Network For Advanced Remote Monitoring Capabilities


**Modbus/TCP:**  
Open Connectivity to Existing Monitoring Systems Without Proprietary Limitations

**NTP Time Clock Synchronization:**  
Facilitates Timeline-Based Logging For Post-Event Reconstruction


**SNMP Connectivity:**  
Permits Remote Management Via Simple Network Management Protocol

**Dry Contacts:**  
Access Alarms Data with Dry Contacts Connections

Power Quality Monitoring



**Real-Time Waveform Capture:**  
Automatically Captures A Picture Of The Power Six-Cycles Before and After Every Event



**ITIC Plotting:**  
Generate ITIC Plots To Determine if Connected Equipment Was Affected by Power Quality Events



**Local Touch-Screen Interface:**  
Password-Protected Color Touch-Screen GUI For Local STS Setup/Operation/ Administration

Equipment Layout

**Main Circuit Breaker Section:**

Auxiliary MCB optional  
Mounting: Fixed, Plug-In  
Type:  
Molded Case Switch  
65kA, 100kA  
Electronic Trip  
65kAIC, 100kAIC  
Accessories:  
CB Shunt-trip  
120VAC, 24VDC  
CB Position Indication:  
Open, Tripped, Closed

**Monitoring Section:**

LCD Membrane Interface Option  
Local/Remote EPO Option

**Distribution Section:**

Sub-feed distribution  
400A SafePanel™  
1200A SafePanel™

**Transformer Section:**


DOE 2016 Efficiency  
Standard



## Reliability Features

### Silver Plated Terminals

LayerZero uses silver plating on all input terminals to ensure the highest performance. With superior conductivity and low resistance, silver provides exceptionally reliable electrical contact.

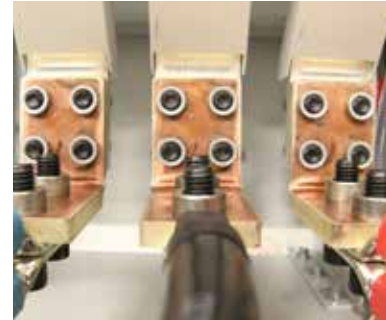

Silver-Plated Customer Connections

### Machined Hardware

Bolted connections are designed with machined cap screws and engineered disc springs. This creates a flat pressure vs. deflection profile, maintaining constant torque throughout the life of the product.

These connections have been tested in wide temperature ranges to ensure that once they are tightened, they stay that way.



Machined Cap Screws and Engineered Disc Springs Utilized in LayerZero Power Systems Products

### Convection Cooling

To address the issues associated with heat dissipation, LayerZero has developed a natural convection cooled heat dissipation system that is maintenance-free.

The advantages of this architecture include:

- No nuisance alarms
- No filters to replace
- No fuses to replace
- Fuseless power train
- Fuseless control power architecture



Convection Cooling in a LayerZero ePODs Type-X PDU

Reliability Features

**Serialized Circuit Boards**

All critical circuit boards and memory cards are serialized and tracked through LayerZero’s eBOSS portal. This system allows customers to reference which components their machines contain, see who tested them, and review testing notes.

Serialized tracking also enables predictive maintenance. If a component fails, it can be cross-referenced with similar parts to identify trends and prevent future issues. This proactive approach maximizes uptime and reliability.



All circuit breakers in LayerZero products are serialized and tracked in an active database

**Vibration Isolation Damper Mounts**

The Series 70 ePODs: Type-X transformers are equipped with vibration isolation damper mounts. These mounts reduce vibration and noise at the source, ensuring electrical and mechanical connections remain stable and reliable throughout the life of the product.



Vibration Isolation Damper Mounts in an ePODs: Type-X PDU

## Ease of Maintenance

**Scan Bolted Connections with Dead-Front Doors Closed**

Strategically placed IR-scan portholes allow safe thermal scanning of all bolted connections without opening the dead-front door. This eliminates operator exposure to power circuit voltage.


The IR window swivels upward and unlocks with keyhole access to reveal a mesh, enabling accurate thermal readings with a point-and-shoot camera. LayerZero also provides documentation to ensure proper thermal scanning procedures.



INSIGHT IR® Portholes allow operators to safely scan bolted connections without opening the dead front doors

**De-Energizable Monitoring Section**

For safer, easier maintenance, the ePODs: Type-X includes fuses that allow the LayerZero DPQM Panel Board Monitor to be safely replaced or upgraded without energizing the monitoring section.

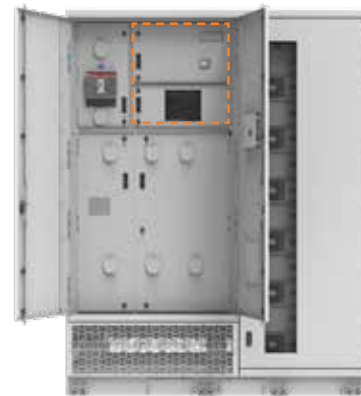

A sectionalized design allows operators to de-energize the monitoring section for maintenance

**View Status LEDs and Distribution CB Positions With Dead-Front Doors Closed**

Our Series 70 product line was inspired by NFPA-70E, to help data centers drastically reduce the risks of their energy distribution systems.

Operators can view the status of diagnostic LEDs without exposure to the energized power electronics section. In addition, SafePanel circuit breaker positions can be viewed with the dead-front door closed.



The polycarbonate window in the subfeed distribution section.

Safety Features

**The LayerZero 1200 A Finger-Safe SafePanel™**

The LayerZero 1200 A SafePanel® Panel Board is designed with operator safety as the top priority.

With no exposed live parts, it provides true finger-safe protection. Optional shrouds can be included to cover unused spaces, further enhancing safety for operators.



The Breaker Is Inserted Into The SafePanel



The Handle Is Unlocked



Screws Help Secure The Breaker



For Maximum Safety, The SafePanel Has Recessed Bus Work And IP-20 Finger Safe Lattice.

Power Quality Monitoring




The Series 70 ePODs: Type-X is equipped with LayerZero DPQM (Distribution Power Quality Monitoring), an all encompassing monitoring system with local and remote communications options.

From basic monitoring & alarm reporting, to advanced power quality monitoring functionality, LayerZero DPQM provides a wide-range of options to help you be aware, be vigilant, be proactive in your quest to create a safe, stable and reliable operation.





LayerZero DPQM Provides Answers

LayerZero DPQM provides timestamped pictures of waveforms before and after events, providing information that enables facilities to go back in time to methodically identify and correct the root causes of events. LayerZero actively captures power quality information at the STS, PDU, and RPP - permitting thorough post-event analysis.

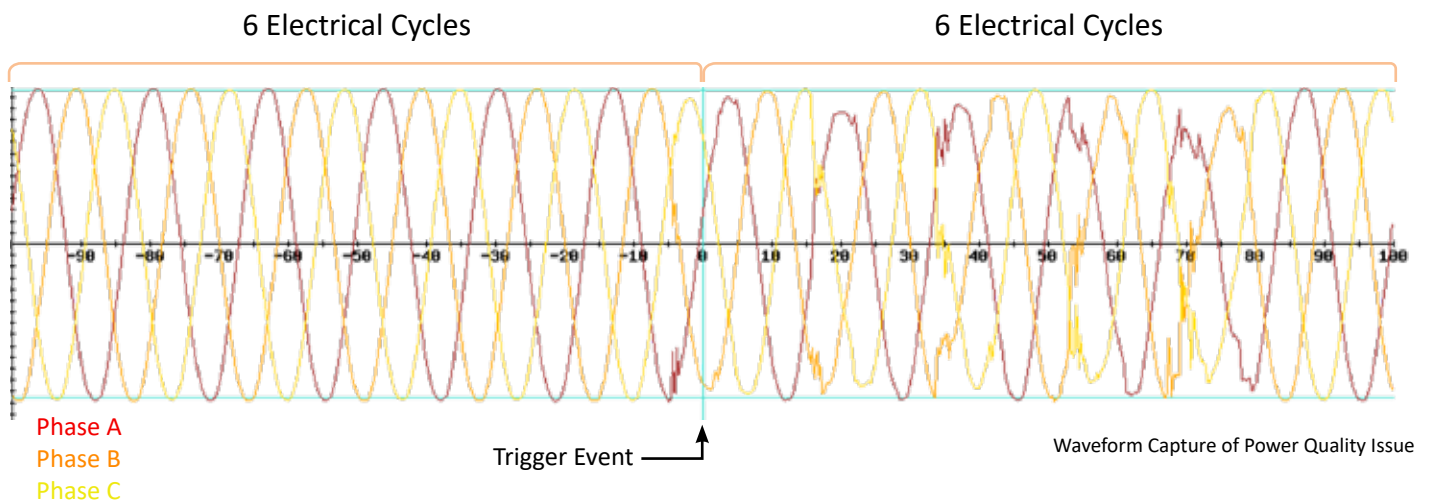

Specifications

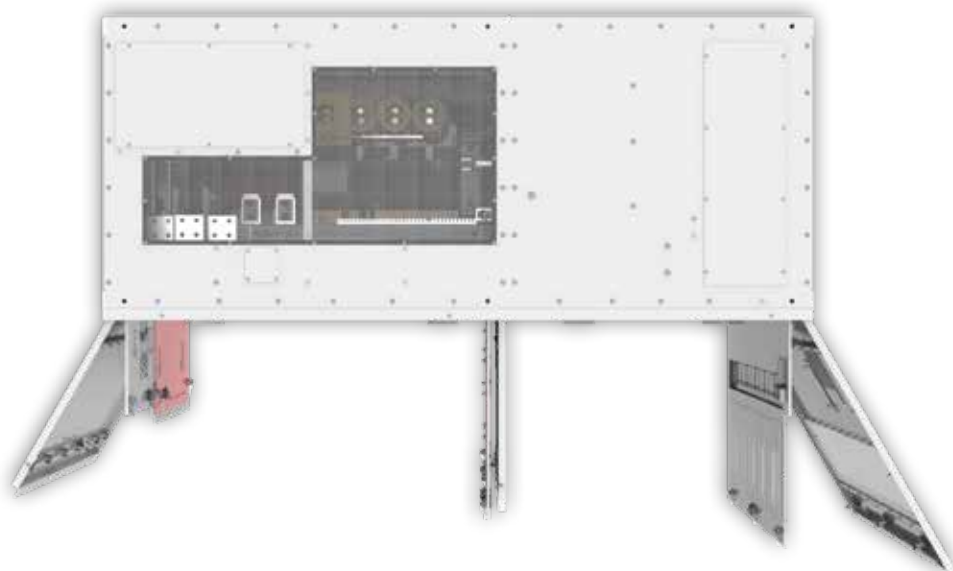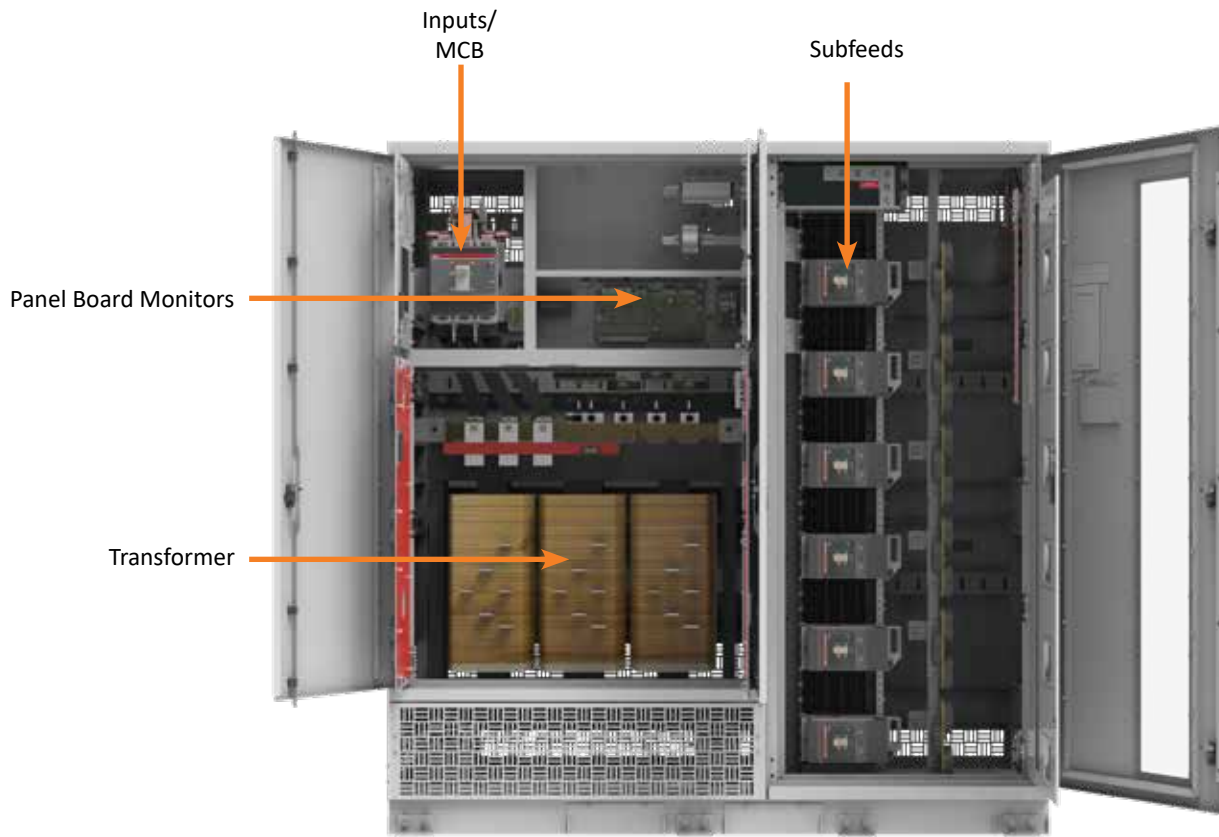


Generate Easy-To-Understand Power Quality Reports with ITIC Plotting

All LayerZero products break down power sources into samples for power quality analysis. This data is remotely accessible by connecting to the units via web browser.

The following “voltage sag” factory test was performed on a LayerZero Series 70 ePODs: Type-X PDU. Each phase is represented by a colored line, plotting the voltage over a period of time.

In the example below, the voltage of all three phases dropped below the user-defined setpoint, which triggered an undervoltage event, an automatic waveform capture, and an ITIC plot of the event.

On LayerZero PDUs and RPPs, waveforms and ITIC plots are generated for every phase, on every circuit, for every event.

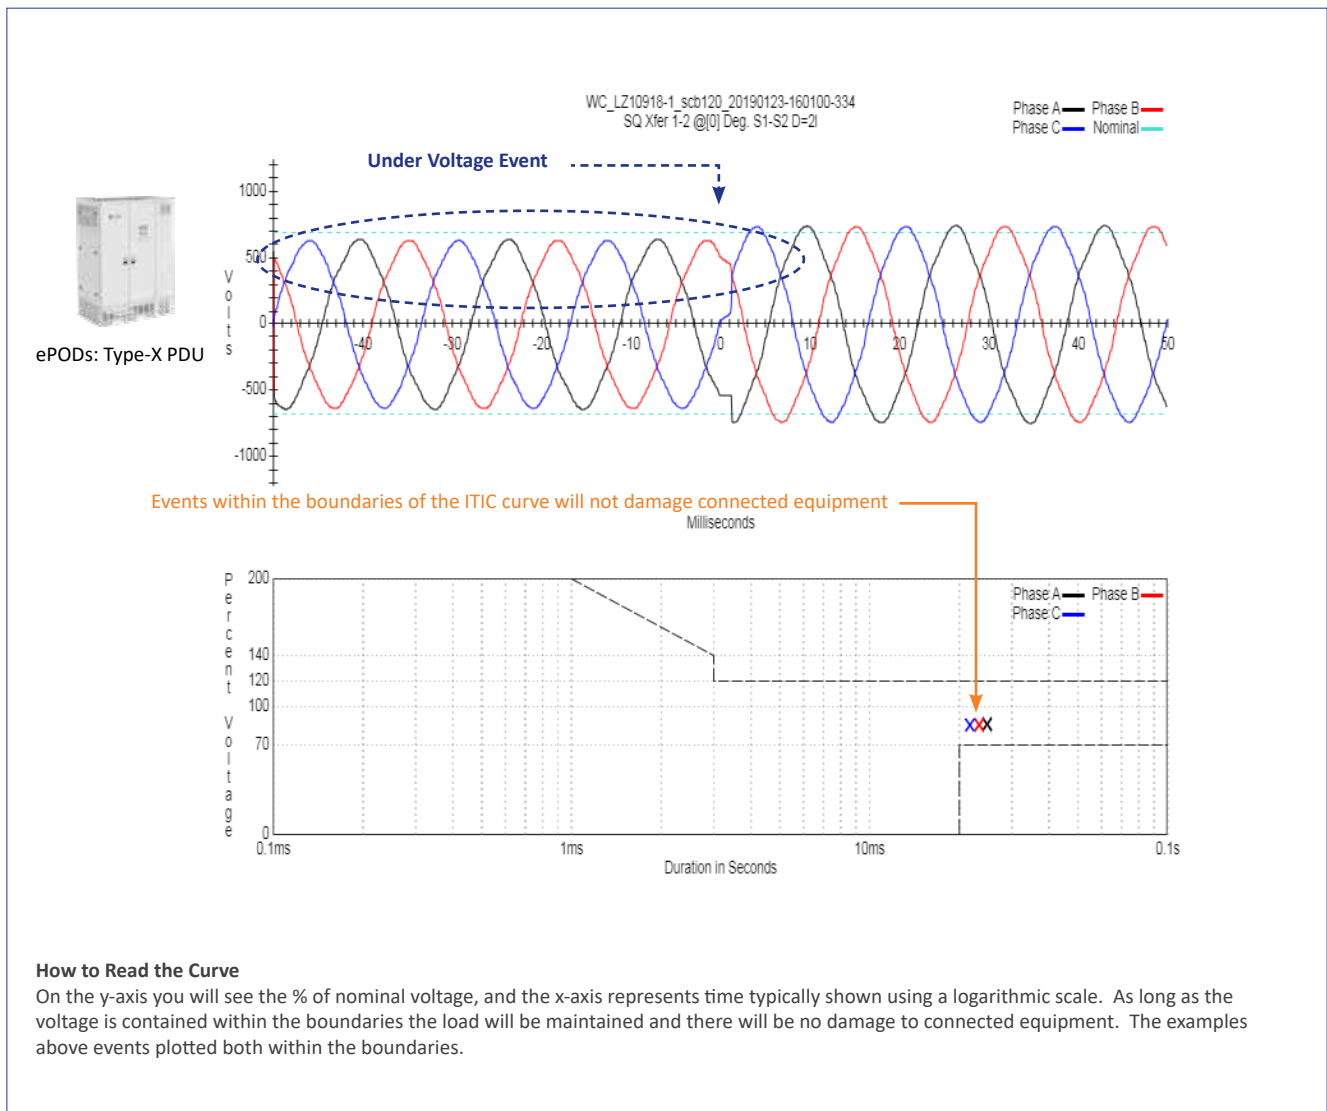

Technical Specifications




LayerZero DPQM Parameters		Mains	Subfeeds or Branch Circuits
Voltage Monitor	Volts (L-L) Phase A/B/C (volts RMS)	✓	
	Volts (L-N) Phase A/B/C (volts RMS)	✓	
	Phase Rotation	✓	
Current Monitor	CT Reversed Phase A/B/C/N	✓	✓
	Current Phase A/B/C/N (amperes RMS)	✓	✓
Power Monitor	Frequency (hertz)	✓	
	Real Power (kilowatts)	✓	✓
	Apparent Power (kilovolt-amperes)	✓	✓
	Reactive Power (kilovolt-amperes reactive)	✓	✓
	Power Factor	✓	✓
	Energy (kilowatt-hours)	✓	✓
	Block Demand (kilowatts)	✓	✓
	Block Demand Peak (kilowatts)	✓	✓
	Rolling Demand (kilowatts)	✓	✓
	Rolling Demand Peak (kilowatts)	✓	✓
Power Quality	Percent VTHD (percent)	✓	✓
	Waveform Capture	✓	✓
Alarms	Phase - Under Voltage A/B/C (Alarm)	✓	
	Phase - Over Voltage A/B/C (Alarm)	✓	
	Phase - Low Voltage A/B/C (Warning)	✓	
	Phase - High Voltage A/B/C (Warning)	✓	
	Phase - Over Current A/B/C (Alarm)	✓	✓
	Phase - High Current A/B/C (Warning)	✓	✓
	Under Frequency (Alarm)	✓	
	Over Frequency (Alarm)	✓	
	High VTHD (Warning)	✓	
	Over VTHD (Alarm)	✓	
	Phase Rotation (Alarm)	✓	


All product specifications are subject to change without notice.

Technical Specifications

Mechanical Characteristics	
Dimensions	Type-X 88" H x 84" W x 36" D (2235 mm H x 2133 mm W x 914.4 mm D)
Heat Dissipation	18,800-28,200 BTU/HR - Varies on Transformer Efficiency, Please Contact LayerZero Engineering.
Weight	1700-3625 lbs (771-1644 kg)- Varies on configuration, Please Contact LayerZero Engineering
Frame Construction	Welded Frame
Color	Textured Powder Coat White (RAL 7035), Blue (RAL 5017), Black, Custom
Seismic Floor Anchors	Optional
Seismic Floor Stand	Optional
Sectionalization	Dead Front Doors; Main CB(s); Monitoring; Transformer
Electrical Characteristics	
Input Voltages	480 V, 3-Phase, 3-Wire + Ground
Output Voltages	120/208 V, 3-phase, 4-wire + Ground
Transformer Size	500kVA
Frequency	60 Hz
Neutral Rating	100%, 200%
Distribution	SafePanel® Distribution
Power Quality Monitoring	
Power Quality Monitoring Technology	LayerZero DPQM (Distribution Power Quality Monitoring)
Waveform Capture	Local Display, Remote Display via Web Browser
Operational Characteristics	
Cooling	Convection Cooling
Cable Access	Top/Bottom
IR Scan Port Type	InSight IR® Portholes
Display Type	3.2" LCD with Membrane, 10.5" Color Touch Screen GUI (Optional)
Connectivity	
Meters	Local Display, Ethernet, Modbus/TCP, http via Web Browser (Non-Proprietary)
Alarms	Local Display, Ethernet, Modbus/TCP, http via Web Browser (Non-Proprietary)
Summary Alarm	Dry Contacts
Waveforms	Local Display, Ethernet, http via Web Browser (Non-Proprietary)
History/Event Log	Local Display, Ethernet, http via Web Browser (Non-Proprietary)
Diagnostics	Local Display, Ethernet, http via Web Browser (Non-Proprietary)
Time Synchronization	Network Time Protocol (NTP)
Standards Conformance: SafePanel Distribution	
UL	ETL Listed to UL 60950
CSA	C22.2 No 29-M1989

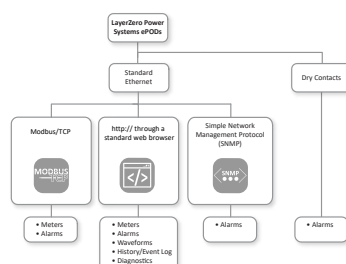

All product specifications are subject to change without notice.



Learn more at [www.LayerZero.com](http://www.LayerZero.com)



LayerZero Power Systems, LLC.  
1500 Danner Drive  
Aurora, OH 44202 U.S.A.

© 2026 LayerZero Power Systems, LLC.

[LayerZero](#)®, INSIGHT IR®, SAFEARM®, SAFEPANEL®, and LayerZero Power Systems, LLC.® are registered trademarks of LayerZero Power Systems, LLC. All Rights Reserved.

All product specifications are subject to change without notice.

Rev. 4/26 #15